

FloorTac™

with Interlam™ Pro Emerytex®

FloorTac™ with Interlam™ Pro Emerytex® is designed for attention-grabbing floor graphics that instantly take floors from drab to fab. Its removable, non-damaging adhesive makes this paired solution ideal for short-term indoor advertising where graphics are applied to the floor. When combined with Drytac's Interlam™ Pro Emerytex® laminating films, FloorTac™ provides a certified slip-resistant finish for the ultimate floor graphic solution.

CAN BE APPLIED TO:

- SHORT PILE CARPETS
- CERAMIC TILES
- SEALED WOOD
- CONCRETE
- WAXED VINYL
- MARBLE, OR TERRAZZO

7.2

mil
(Total Solution)

☐ Interlam Pro Emerytex
Matte Pebble PVC Film

☐ FloorTac
Matte White PVC Film



FloorTac
(Eco) Solvent
Latex
UV



Interlam Pro Emerytex
Pressure Sensitive Acrylic
Adhesive

FloorTac
Removable Gray Acrylic
Adhesive



Widths up to 54in




INTERIOR*

ENGINEERED WITH NO-LIFT TECHNOLOGY



APPLICATIONS

SCHOOLS
HOSPITALS
RETAIL ADVERTISING
SUPERMARKETS
RESTAURANTS

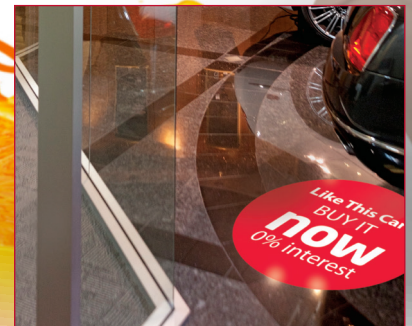

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com

FloorTac™

with Interlam™ Pro Emerytex®

FloorTac™ is a 3.2 mil (80µ) printable matte white polymeric PVC film with a removable, pressure sensitive gray acrylic adhesive protected by a poly coated Kraft release liner.

Interlam™ Pro Emerytex® is a 4 mil (100µ) monomeric soft calendared PVC laminating film with a matte pebble textured finish, coated on one side with a pressure sensitive acrylic adhesive that is protected by a bleached Kraft release paper coated on both sides with PE and siliconized on the release side.

- IDEAL FOR SHORT-TERM INDOOR FLOOR GRAPHICS
- THE PAIRED SOLUTIONS CARRIES SEVERAL SLIP RATINGS & CERTIFICATIONS
- FOR BEST RESULTS, LEAVE A 0.25" (6MM) NON-PRINTED BORDER AROUND THE EDGE OF THE IMAGE.

* Up to 9 months indoor durability dependent upon floor-traffic and correct installation.

For more information, performance and warranty guidelines please contact your local Drytac office.

© 2020 Drytac Corporation. E&OE.
All other trademarks are the property of their respective owners.

TECHNICAL SPECIFICATION

FloorTac™

PRODUCT STRUCTURE

Film	Matte White Polymeric PVC
Adhesive	Removable Gray Acrylic (Pressure Sensitive)
Release Liner	90# Poly Coated Kraft

FloorTac™

PRODUCT CHARACTERISTIC

Film Thickness	3.2 mil (80µ) 4.2 mil
Adhesive Layer	1 mil (25µ) (105µ)
Fire Ratings	Class A or 0 (ASTM E-84) PASS (CAN/ULC-S102)
Application Temperature	>-4°F (-20°C)
Service Temperature Range	-22°F to 302°F (-30°C to 150°C)

Interlam™ Pro Emerytex®

PRODUCT STRUCTURE

Film	Matte Pebble Textured Monomeric PVC
Adhesive	Acrylic (Pressure Sensitive)
Release Liner	2 Side PE Coated, 1 Side Siliconised Kraft

Interlam™ Pro Emerytex®

PRODUCT CHARACTERISTICS

Film Thickness	4 mil (100µ) 5 mil
Adhesive Layer	1 mil (25µ) (125µ)
Fire Ratings	Class 0 (BS 476 Part 6 and 7) Class 1 or A (ASTM E-84)
FDA Certification	PASS (FDA 21 CFR 177.1975)
Slip Certifications	Low Slip Potential (EN 13036-4) R 11 (DIN 51130:2010) Dry: 62; Wet: 35 (HB198:2014 (AS/NZS 4586)) Acceptable (ANSI B101.3)
Application Temperature	>41°F (20°C)
Service Temperature Range	-4°F to 203°F (-20°C to 95°C)

Shelf Life	2 years
Storage Conditions	59°F to 72°F (15°C to 22°C); 50 - 55% Relative Humidity

DRYTAC®
ADHESIVE SCIENCE

www.drytac.com