


5K DROP THROUGH ANCHORS - 8.5'

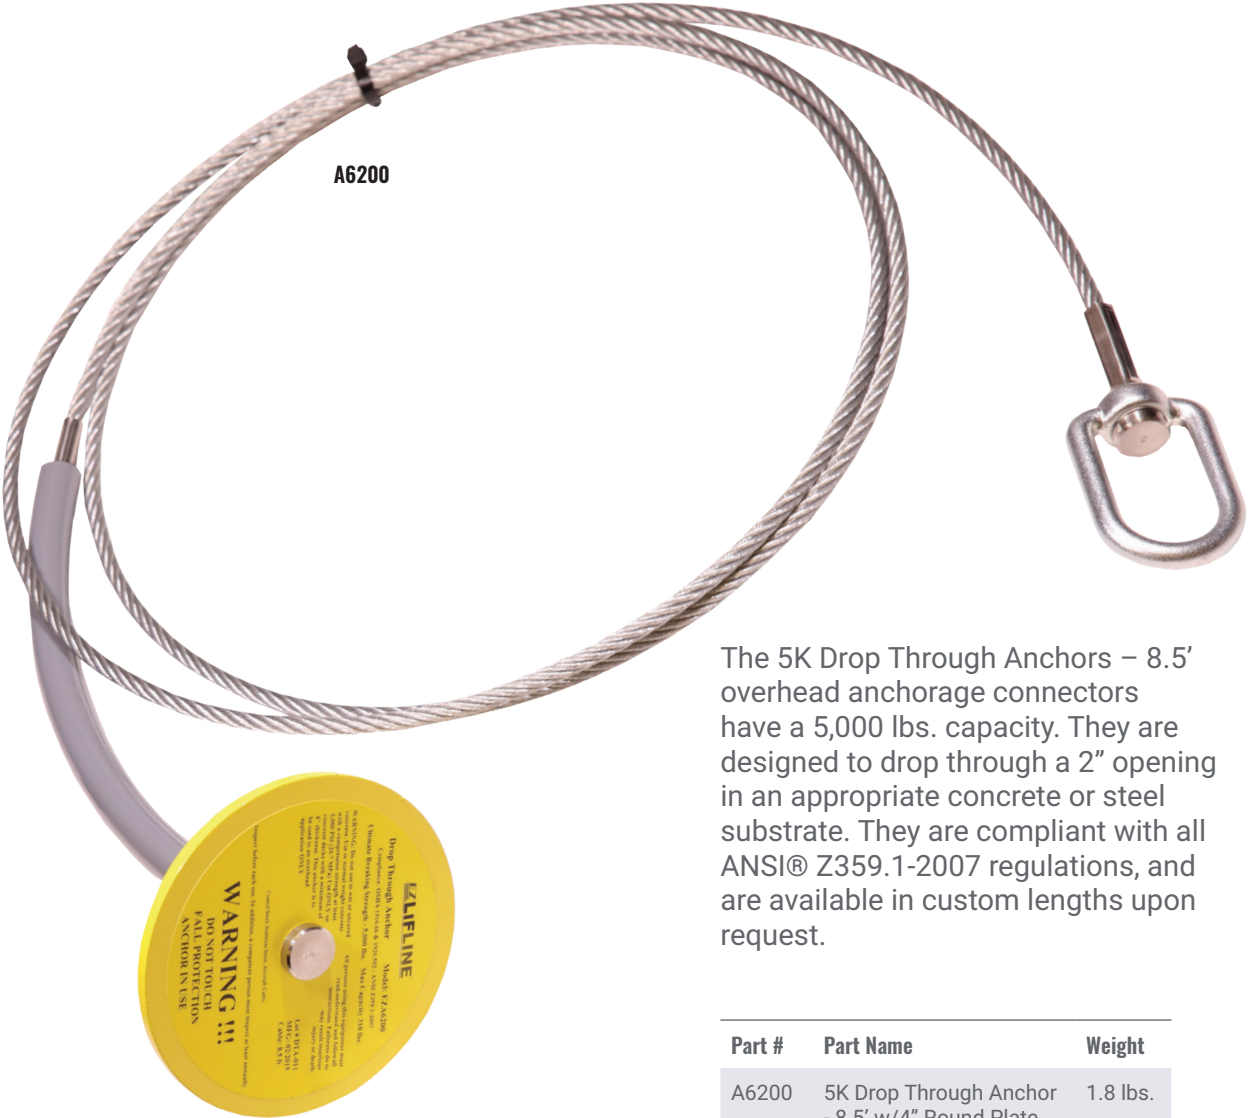

The 5K Drop Through Anchors – 8.5' overhead anchorage connectors have a 5,000 lbs. capacity. They are designed to drop through a 2" opening in an appropriate concrete or steel substrate. They are compliant with all ANSI® Z359.1-2007 regulations, and are available in custom lengths upon request.

Part #	Part Name	Weight
A6200	5K Drop Through Anchor - 8.5' w/4" Round Plate	1.8 lbs.
A6201	5K Drop Through Anchor - 8.5' w/6" Round Plate	2.7 lbs.
A6202	5K Drop Through Anchor - 8.5' w/12" Round Plate	8.9 lbs.

Key Features

- Plate Dimensions Available to Accommodate a Variety of Different Applications: 4", 6", and 12"
- Minimum Breaking Strength: 5,000 lbs.
- Application: Concrete Floors, Steel Girders and Steel Grates
- Compliance: ANSI Z359.1-2007, OSHA 1926.502 and OSHA 1910.66

