☐ G1796 WideArea™ Eye/Face Wash, Pedestal Mounted, All-PVC Construction

Application: Free standing, pedestal mounted WideArea™ eye/face wash. Constructed entirely in PVC and PVC-coated brass. Ideal for use in industrial environments where harsh acids or caustics are present. Four GS-Plus™ spray-type outlet heads deliver a flood of water over a wide area of coverage for complete rinsing of eyes and face.

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS PVC-coated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals.

Bowl: 11-3/4" diameter orange ABS plastic.

Pipe and Fittings: Schedule 80 PVC.

Supply: 1/2" NPT female inlet.

Waste: 2" socket weld female outlet.

Sign: ANSI-compliant identification sign.

Quality Assurance: Unit is completely assembled and water tested prior to shipment.



Available Options

- ☐ **GRN** Green ABS plastic bowl.
- ☐ **YEL** Yellow ABS plastic bowl.
- ☐ **HS** Auxiliary hand-held drench hose for rinsing eyes, face or body.
- ☐ **SC** Self-closing ball valve. *Note: Eye/face washes with self-closing valves do not comply with ANSI Z358.1-2014.*
- ☐ **TMV** G3600LF thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Units" section for complete technical and product selection information.

Guardian Equipment
1140 N North Branch St
Chicago, IL 60642

312 447 8100 TELEPHONE
312 447 8101 FACSIMILE
gesafety.com


Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1-2014.

Guardian

WideArea™ Eye/Face Washes

☐ G1796 WideArea™ Eye/Face Wash, Pedestal Mounted, All-PVC Construction

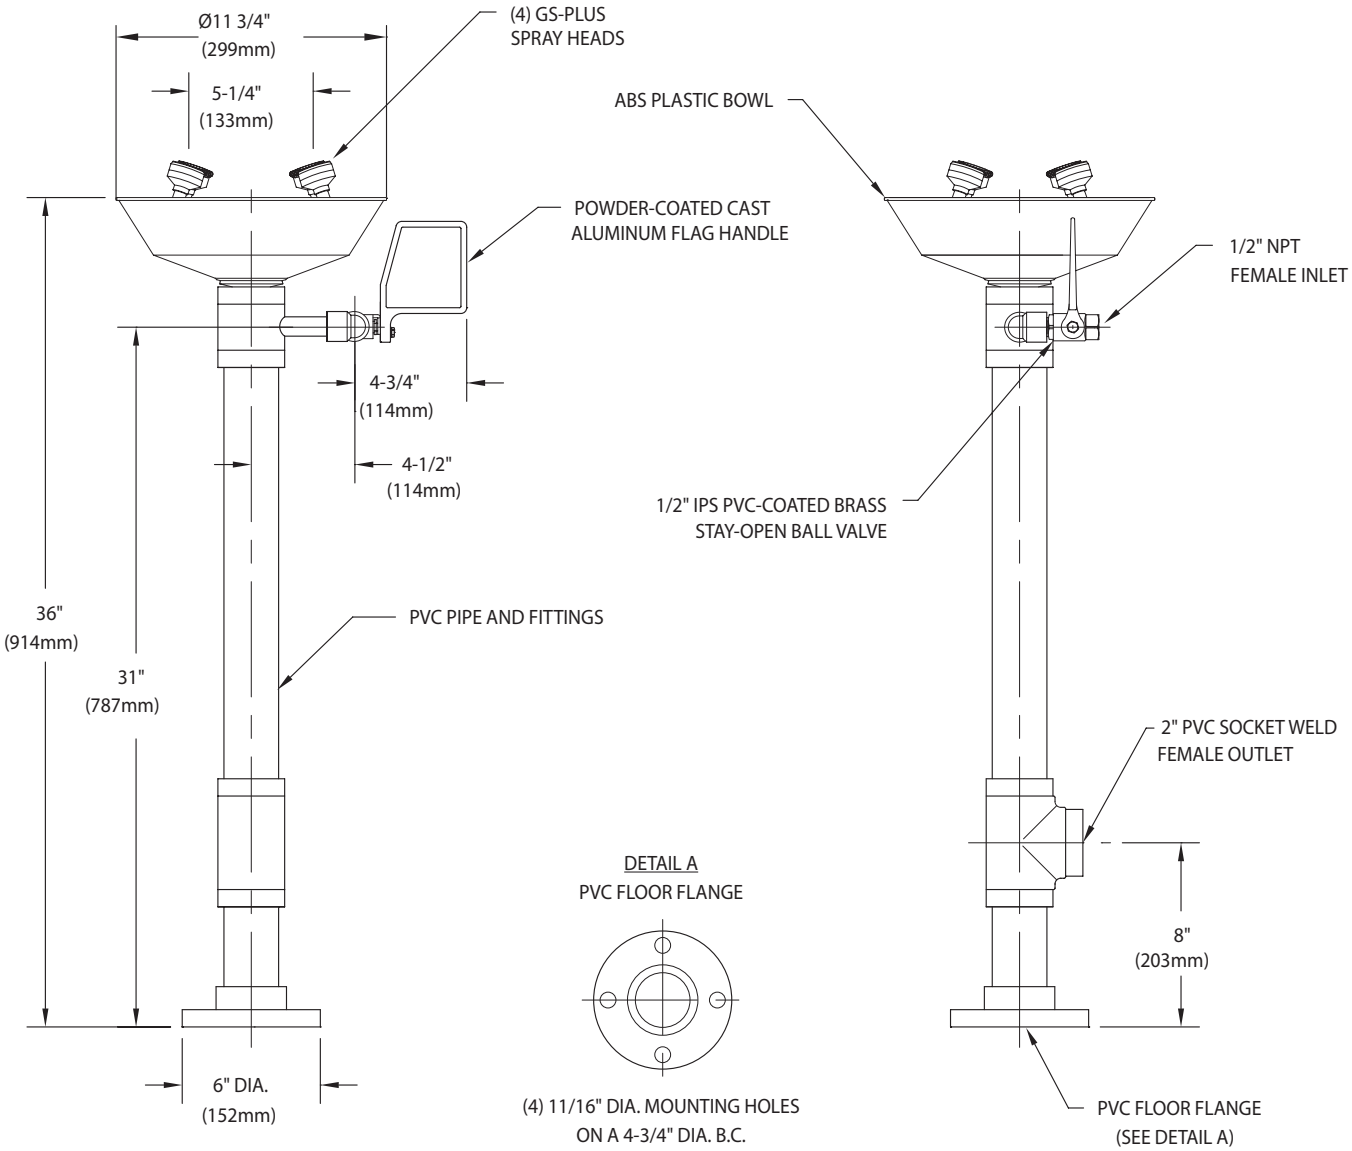

DETAIL A
PVC FLOOR FLANGE

(4) 11/16" DIA. MOUNTING HOLES
ON A 4-3/4" DIA. B.C.

NOTE:
EACH GS-PLUS SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.

Sign Included



THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0115

Guardian Equipment
1140 N North Branch St
Chicago, IL 60642

312 447 8100 TELEPHONE
312 447 8101 FACSIMILE
gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.

ETL Listed 101496. Units have been tested to and comply with ANSI Z358.1-2014.