☐ GBF1721 Barrier-Free WideArea™ Eye/Face Wash, Wall Mounted, Stainless Steel Bowl and Skirt



Application: Barrier-Free WideArea™ eye/face wash for wall mounting. Bowl is lowered and extended to permit access by wheelchair user. Profile of unit is "flattened" to comply with maximum height and knee clearance requirements. Unit has stainless steel bowl and wrap around skirt to conceal valve, drain and piping.

ADA Compliance: When installed at recommended mounting height, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach, minimum knee clearance and distance from obstructions).

Spray Head Assembly: Four GS-Plus™ spray heads. Each head has a "flip top" dust cover, internal flow control and filter to remove impurities from the water flow.

Valve: 1/2" IPS brass stay-open ball valve. Valve is US-made with chrome plated brass ball and PTFE seals.

Bowl: 11-1/8" stainless steel with wraparound skirt.

Mounting: Bowl and skirt unit has welded stainless steel bracket for wall mounting.

Supply: 1/2" NPT female inlet.

Waste: 1-1/2" OD chrome plated brass tailpiece.

Sign: ANSI-compliant identification sign.

Quality Assurance: Unit is completely assembled and water tested prior to shipment.

Available Options

☐ **DC** Stainless steel dust cover for each spray head.

☐ **HS** Auxiliary hand-held drench hose for rinsing eyes, face or body.

☐ **T** Chrome plated brass tailpiece and trap with 1-1/2" IPS waste connection.

☐ **G3600LF** Thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Valves" section for complete technical and product selection information.

Guardian Equipment
1140 N North Branch St
Chicago, IL 60642


312 447 8100 TELEPHONE
312 447 8101 FACSIMILE
gesafety.com


Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.


Guardian


Barrier-Free Units

☐ GBF1721 Barrier-Free WideArea™ Eye/Face Wash, Wall Mounted, Stainless Steel Bowl and Skirt

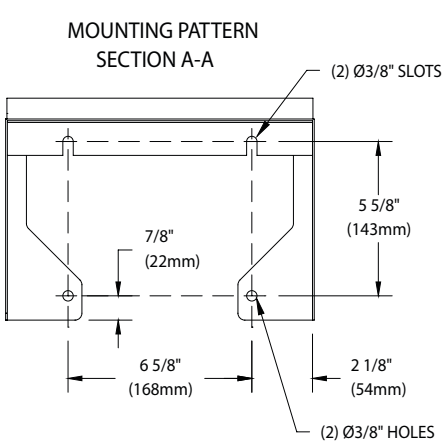

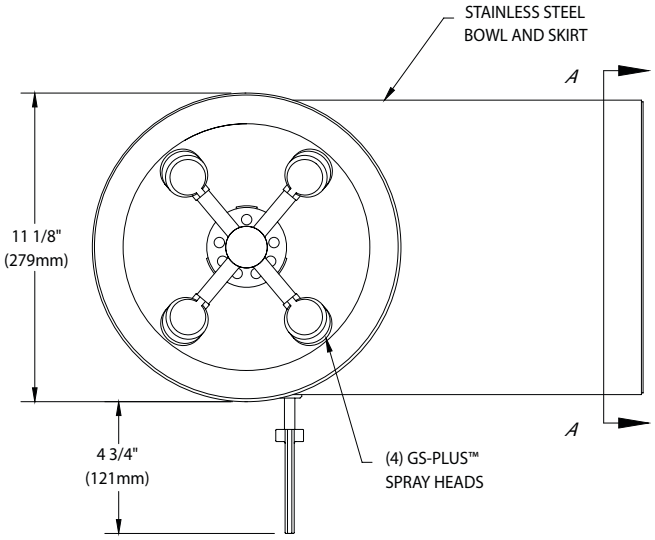

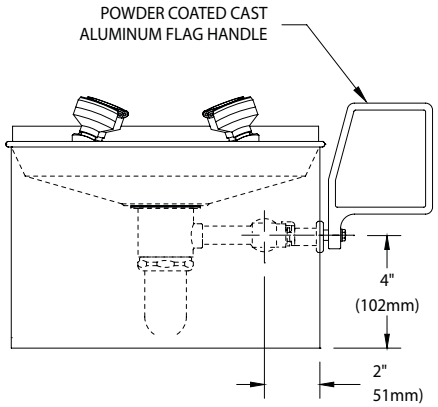

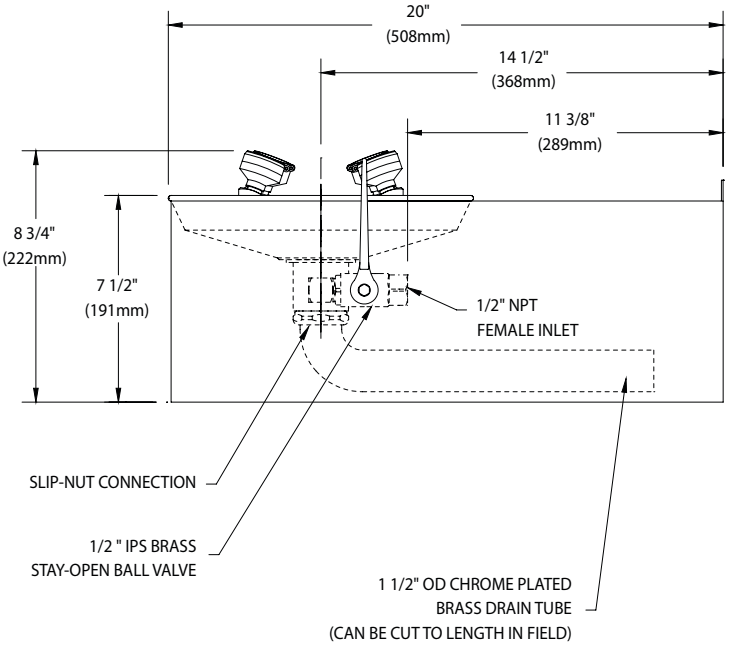

NOTES:

1. EACH GS-PLUS™ SPRAY HEAD HAS A "FLIP-TOP" DUST COVER, INTERNAL FLOW CONTROL AND FILTER TO REMOVE IMPURITIES FROM THE WATER FLOW.
2. UNIT SHOULD BE INSTALLED SO THAT SPRAY HEADS ARE NO MORE THAN 36" ABOVE FINISHED FLOOR.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Sign Included



Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are ± 1/4" (6mm). rev. 0117

Guardian Equipment
1140 N North Branch St
Chicago, IL 60642

312 447 8100 TELEPHONE
312 447 8101 FACSIMILE
gesafety.com

Listed 8116. Units have been tested to and comply with ANSI Z358.1-2014 and the Uniform Plumbing Code.