
NOTRAX®

Justrite Safety Group

117 - HERITAGE RIB™

PRODUCT INFORMATION BROCHURE

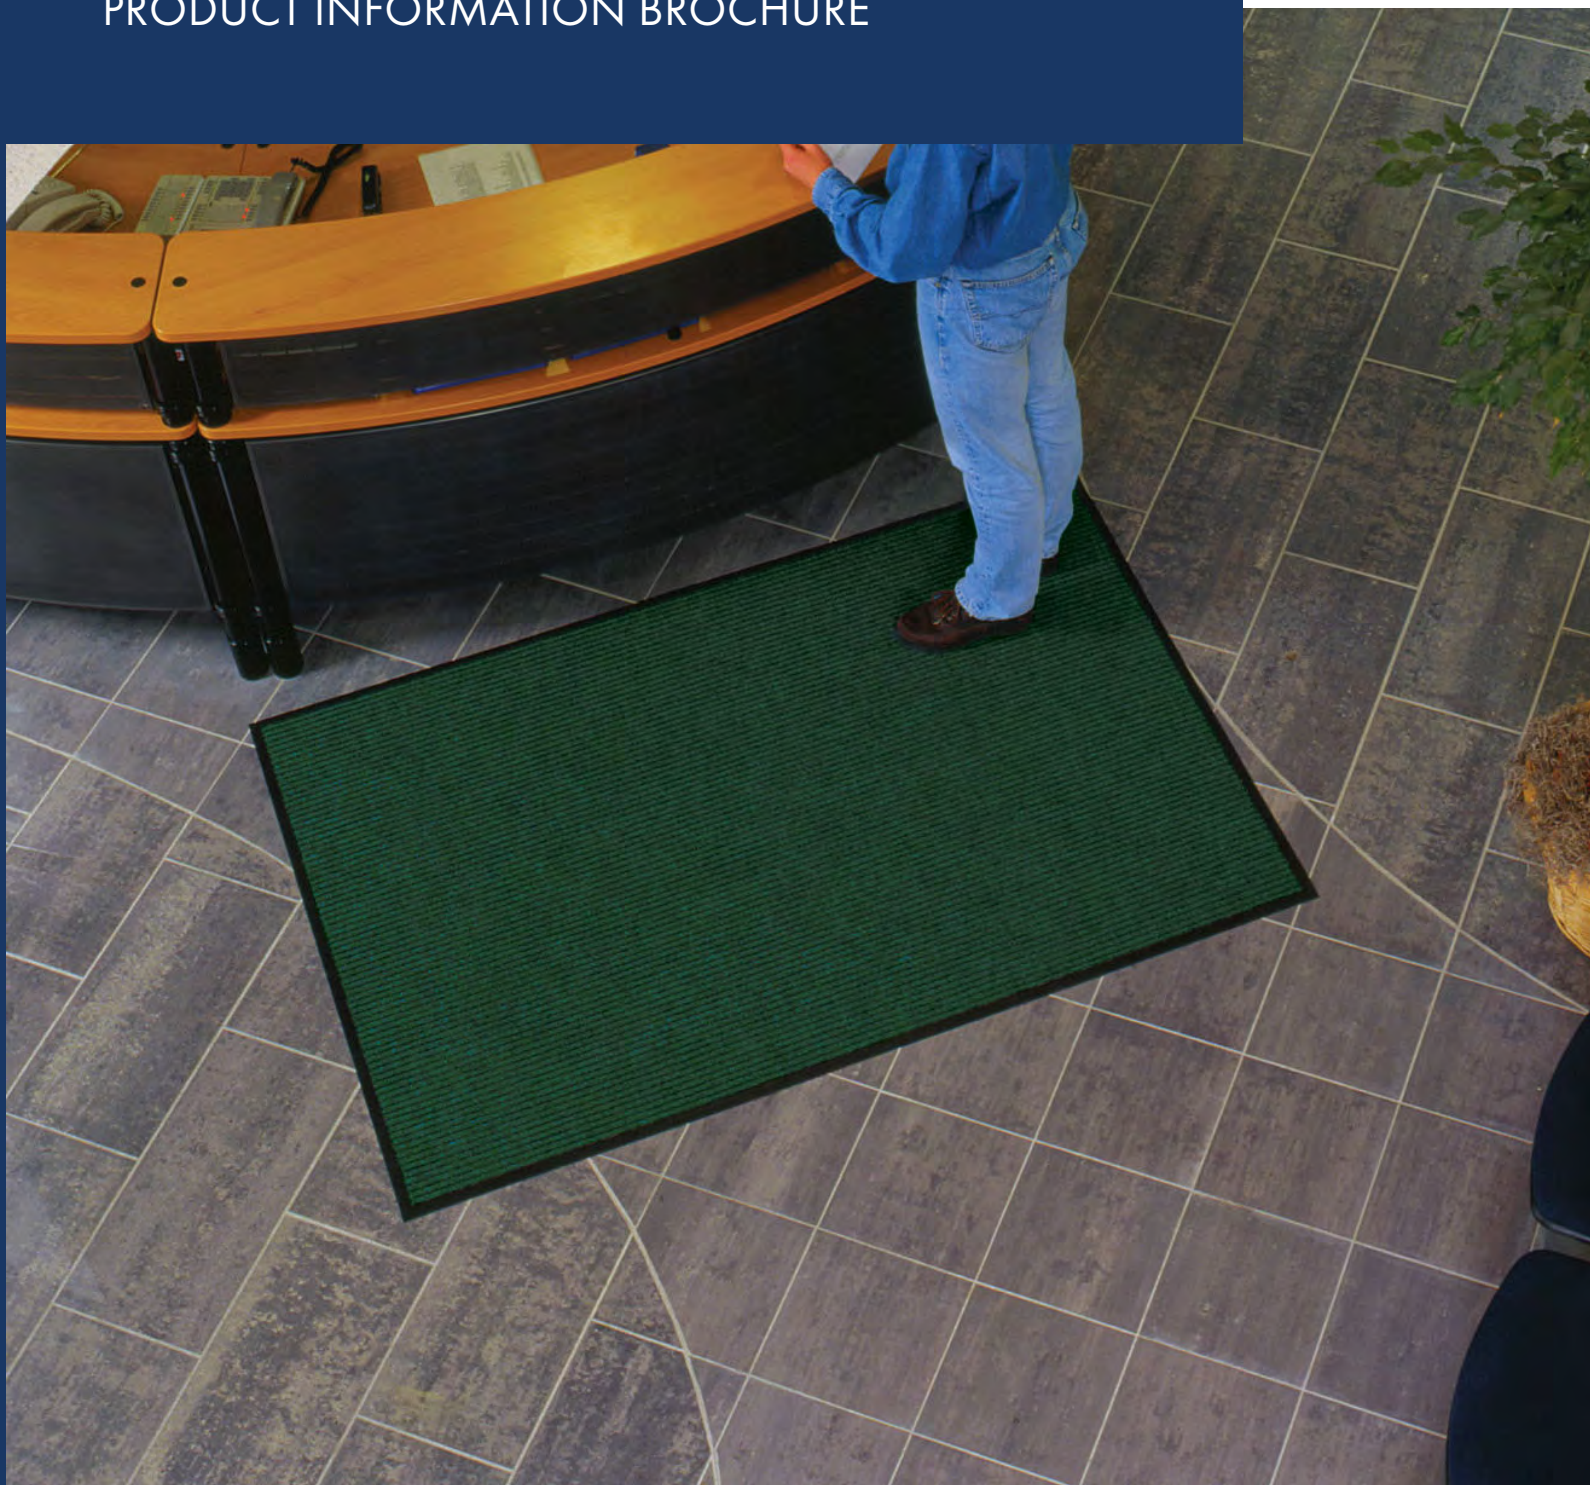

Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**




117 - HERITAGE RIB™ offers a heavier-weight double rib high/low design that performs the scraping function of the mat. This medium to heavy traffic entrance mat is intended for areas that need extra moisture retention and scraping action and has 33% more carpet than many competitors' "best" rib mats. Heavy-weight vinyl non-slip backing ensures minimum movement.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- Scraper mat
- Heavier-weight double rib high/low design
- 24 ounces of needle-punched yarn per square yard
- Low profile to perform in narrow clearance doorways
- Vinyl backing ensures minimal buckling and mat movement
- Recommended and approved product as a part of the GreenTRAX™ program for "Green Cleaning" environments

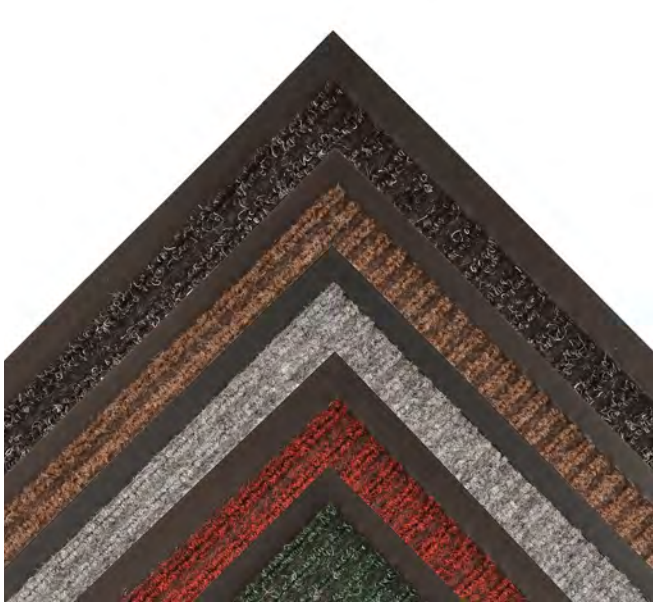

MODEL: 117

APPLICATIONS

- Schools
- Hospital Entrances
- Lobbies
- Entranceways

SPECIFICATIONS

Stock Sizes	2'x3', 3'x4', 3'x5', 3'x6', 3'x10', 4'x6', 4'x8'
Roll Sizes	3'x60', 4'x60', 6'x60'
Thickness	3/8"
Cut Lengths	3', 4', and 6' widths (up to 60' long)
Colors	Red/Black, Charcoal, Brown, Grey, Green



Performance:

	Good	Better	Best	Superior
Wear Retention	■			
Crush Resistance	■	■		
Soil Resistance	■			
Function & Appearance	■	■		

Cut Lengths

Heavy Traffic

TESTING DATA

Test	Test Description	Results
ASTM 5252-98a	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 2.0 Color: 3.0
ASTM D3936-05	Delamination	Exceeds backing strength
ASTM D6540-05	Accelerated Soiling	Based on Visual Inspection 4.5- Vacuum Rating 5.0- Rating After Extraction
ASTM D412	Breaking Load/Elongation	148.3 lbs/in2
ASTM D1894-08 (modified)	Static & Kinetic Coefficient of Friction	0.74
ASTM D2859 (CPSC FF 1-70)	Flammability	Pass

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: customerservice@notrax.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.