
NOTRAX®

Justrite Safety Group

170 - ORIENTRAX®

PRODUCT INFORMATION BROCHURE

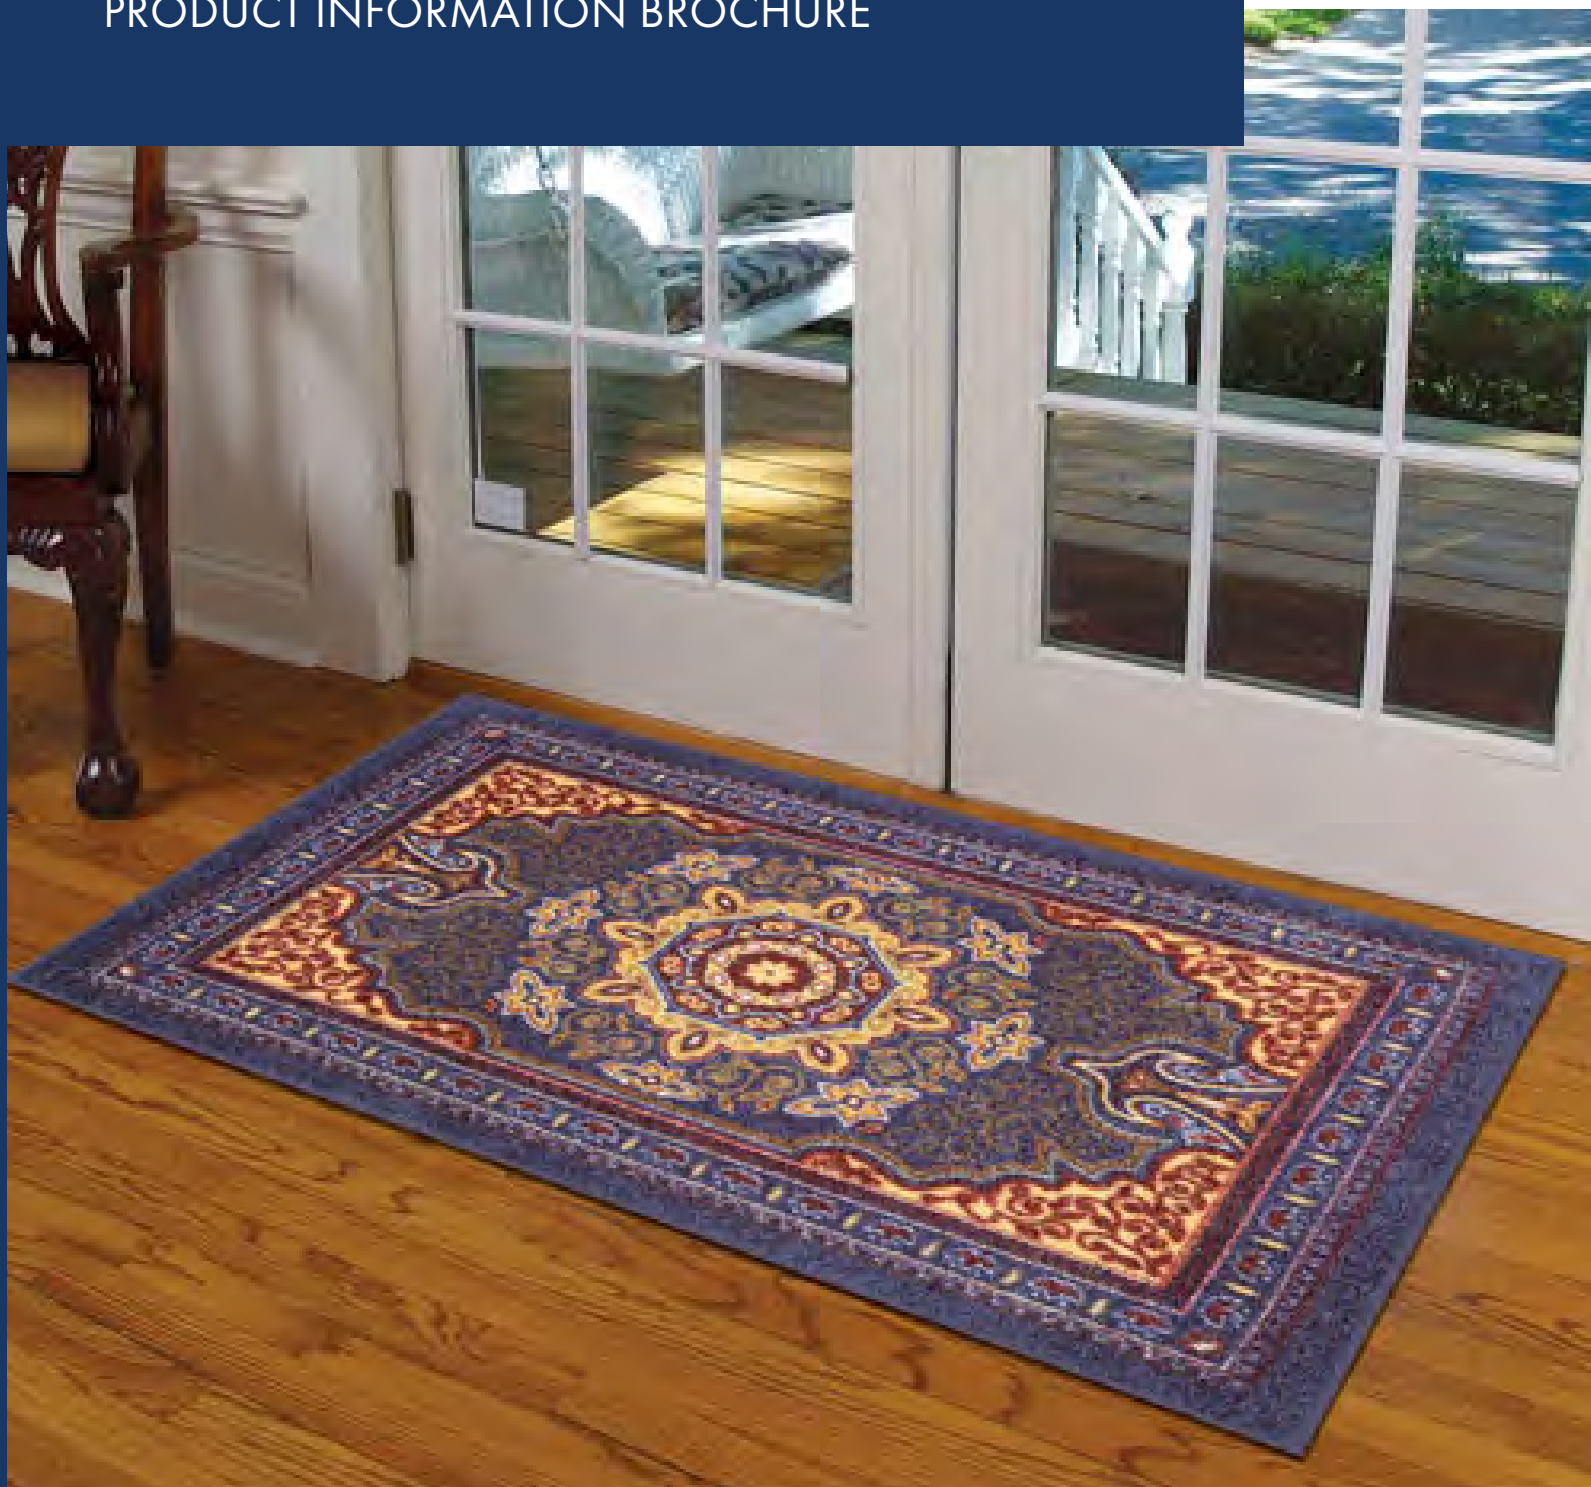

NOTRAX®
Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**




170 - ORIENTAX® combines the classic look of an area rug with the function and durability of a high performance entrance mat. 24 ounces of twisted nylon fiber per square yard provides superior moisture absorption and retention, while a heavyweight non-slip backing ensures minimal mat movement. A dye-injection process that infuses dye directly into the yarn strand ensures that the vibrant color designs won't fade.

Material: Nylon Carpet W/Vinyl Backing

Features and Benefits:

- Drying mat
- Combines the classic look of an upscale rug with the function and durability of a high performance entrance mat
- Nylon fibers provide superb moisture absorption and retention
- Vibrant color designs that won't fade
- 24 ounces of twisted nylon fiber per square yard
- Low profile to perform in narrow clearance doorways
- Vinyl backing ensure minimal buckling and mat movement

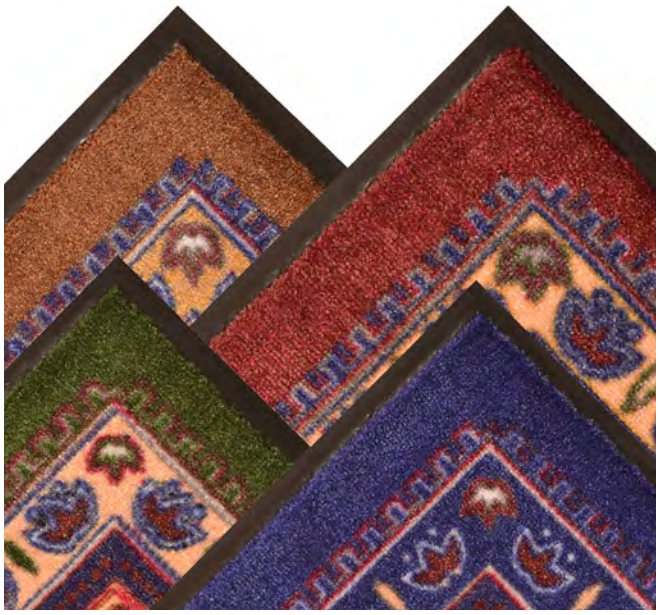

MODEL: 170

APPLICATIONS

- Hotels
- Offices
- Corporate Offices
- Professional Buildings

SPECIFICATIONS

Stock Sizes	3'x5', 4'x6', 4'x12', 5'x8'
Thickness	3/8"
Colors	Burgundy, Mocha, Emerald, Sapphire



Performance:

	Good	Better	Best	Superior
Water Retention	■	■	■	
Crush Resistance	■			
Soil Resistance	■			
Function & Appearance	■	■		

Medium Traffic

Heavy Traffic

TESTING DATA

Test	Test Description	Results
ASTM D1894-08	Static and Kinetic Coefficients of Friction	Painted Concrete: Avg. Load 32.3 lbs; COF 0.65 Epoxy Concrete: Avg. Load 31.5 lbs; COF 0.63 VCT: Avg. Load 35.9 lbs; COF 0.72 Vinyl Sheet: Avg. Load 27.7 lbs; COF 0.55
ASTM D-5252-98	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.2 Color: 3.0
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 1.0 - Vacuum Rating 3.0 - Rating After Extraction
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D412-06	Breaking Load and Elongation	225.6 lbs/Inch2
ASTM D3936-05	Delamination	Construction would not allow for delamination
ASTM D2240-02	Durometer (Hardness)	75
ASTM D1335-05	Tuft Bind	9.0 lbs.

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.