
NOTRAX®

Justrite Safety Group

194 - SAFETY MESSAGE MATS

PRODUCT INFORMATION BROCHURE

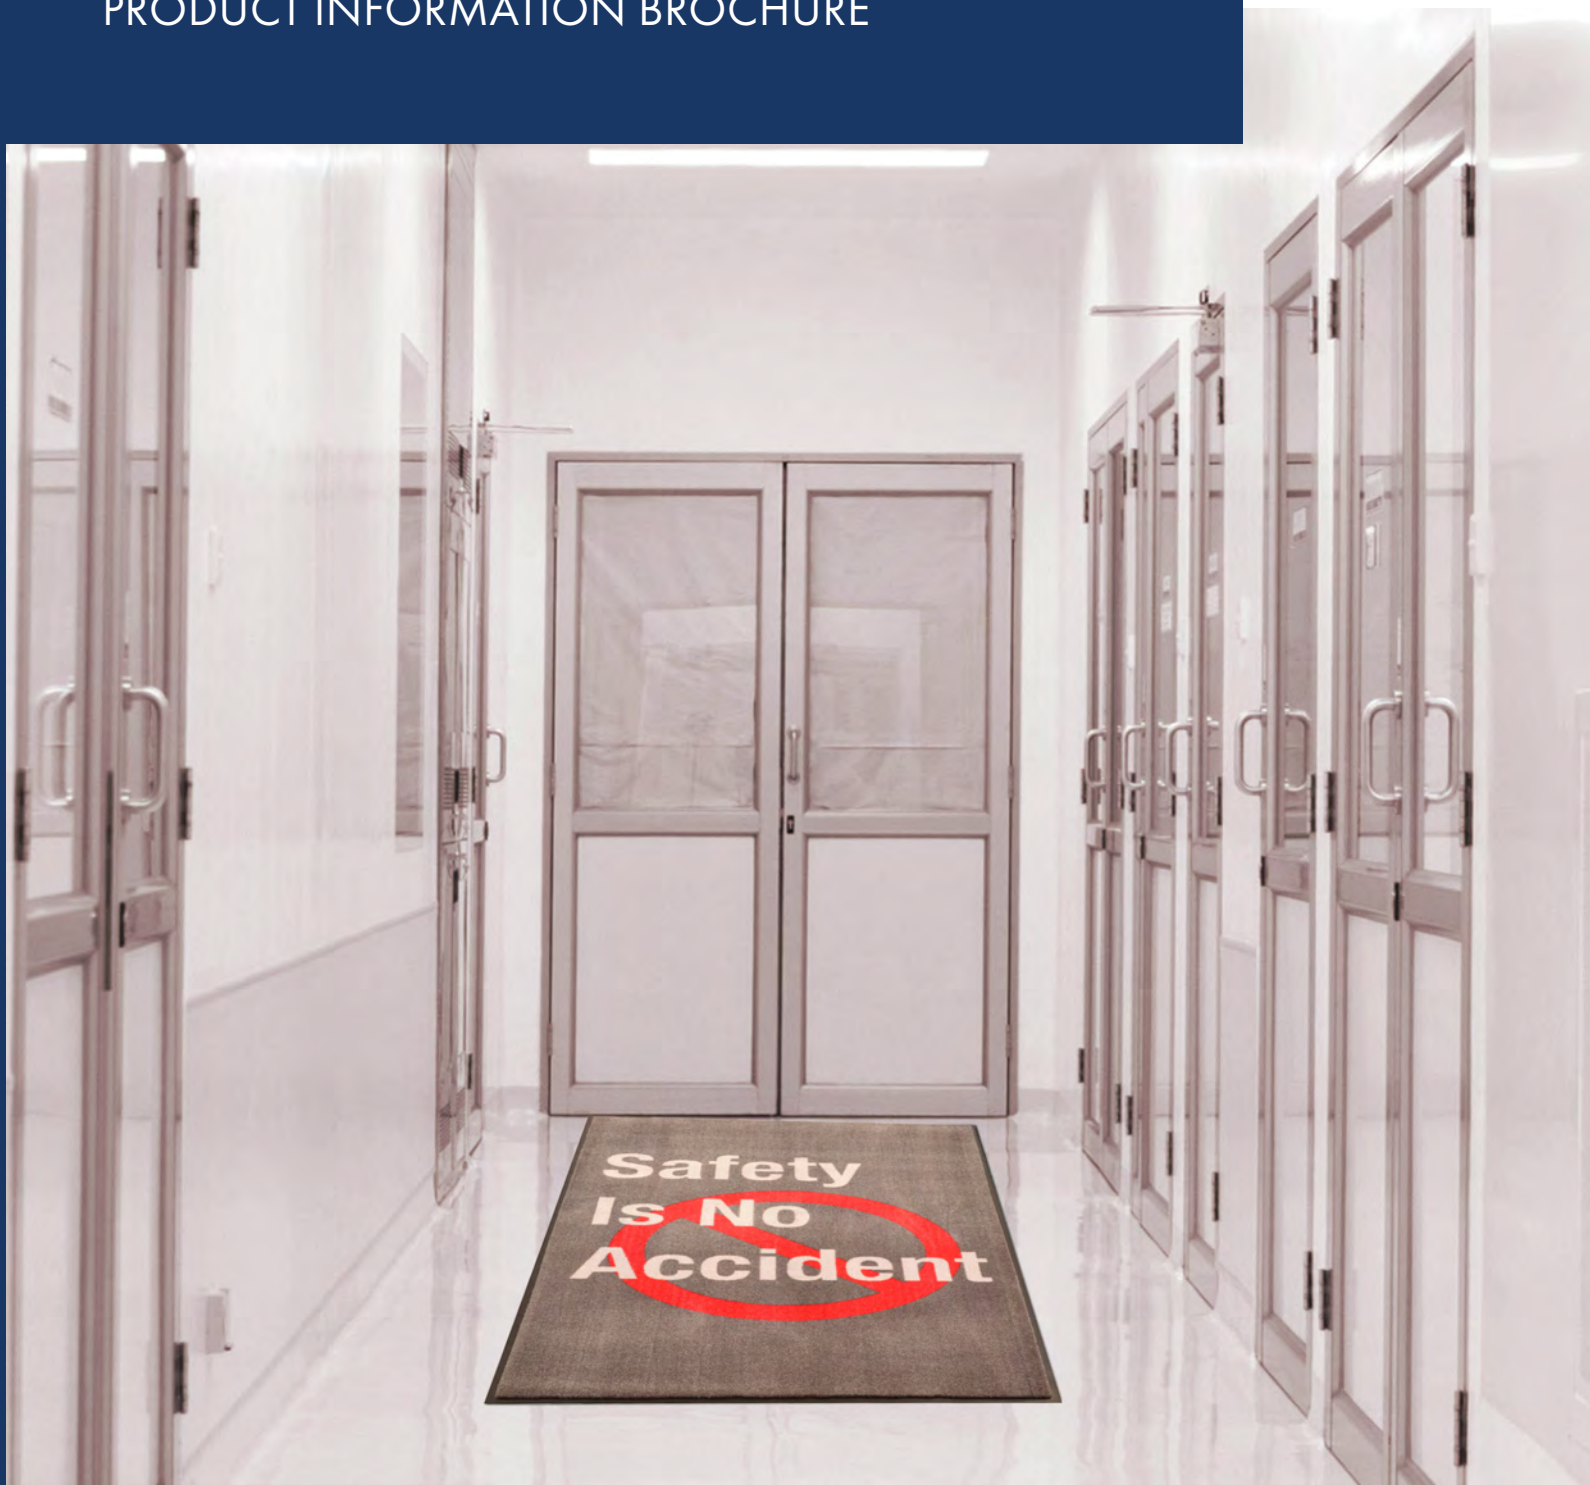

Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**



194 - SAFETY MESSAGE MATS make your safety message loud and clear while keeping facilities cleaner and safer. Pre-printed message mats warn employees who may be entering a hazardous area, may need special ear or eye protection, or just act as a reminder to think and act safely in work environments. Pre-printed message mats offer functionality as an entrance mat cleaning dirt and moisture from shoes, keeping facilities cleaner and safer. Select messages are also available in Spanish.

Material: Polypropylene Carpet W/Vinyl Backing

Features and Benefits:

- 14 pre-printed messages to choose from
- Highly visible colors and graphics for immediate identification
- 24 ounce nylon top surface provides excellent moisture absorption and retention
- Vinyl backing ensure minimal buckling and mat movement
- Select messages also available in Spanish



MODEL: 194

APPLICATIONS

- Lobbies
- Foyers
- Plant Entrances
- Employee Entrances

SPECIFICATIONS

Stock Sizes	3'x5', 4'x6'
Thickness	3/8"
Messages	Caution Caution Watch Forklift Traffic Do Not Disturb Ear Protection Required Safety for Life Safety Begins Here Safety is no accident Safety Starts Here Stop Watch Forklifts Tornado Shelter Stop Think Safe Watch Your Step



Performance:

	Good	Better	Best	Superior
Water Retention	■	■		
Crush resistance	■			
Soil Resistance	■	■		
Function & Appearance	■	■		

Medium Traffic

TESTING DATA

Test	Test Description	Results
ASTM D1894-08	Static and Kinetic Coefficients of Friction	Painted Concrete: Avg. Load 32.3 lbs; COF 0.65 Epoxy Concrete: Avg. Load 31.5 lbs; COF 0.63 VCT: Avg. Load 35.9 lbs; COF 0.72 Vinyl Sheet: Avg. Load 27.7 lbs; COF 0.55
ASTM D-5252-98	Accelerated Wear - 4,000 cycles (Hexapod Tumble Drum Tester)	Appearance: 3.2 Color: 3.0
ASTM D6540-00	Accelerated Soiling	Based on Visual Inspection 1.0 - Vacuum Rating 3.0 - Rating After Extraction
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D412-06	Breaking Load and Elongation	225.6 lbs/Inch2
ASTM D3936-05	Delamination	Construction would not allow for delamination
ASTM D2240-02	Durometer (Hardness)	75
ASTM D1335-05	Tuft Bind	9.0 lbs.

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.