NOTRAX®

Justrite Safety Group

543 - CUSHION-TRED™

PRODUCT INFORMATION BROCHURE




Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

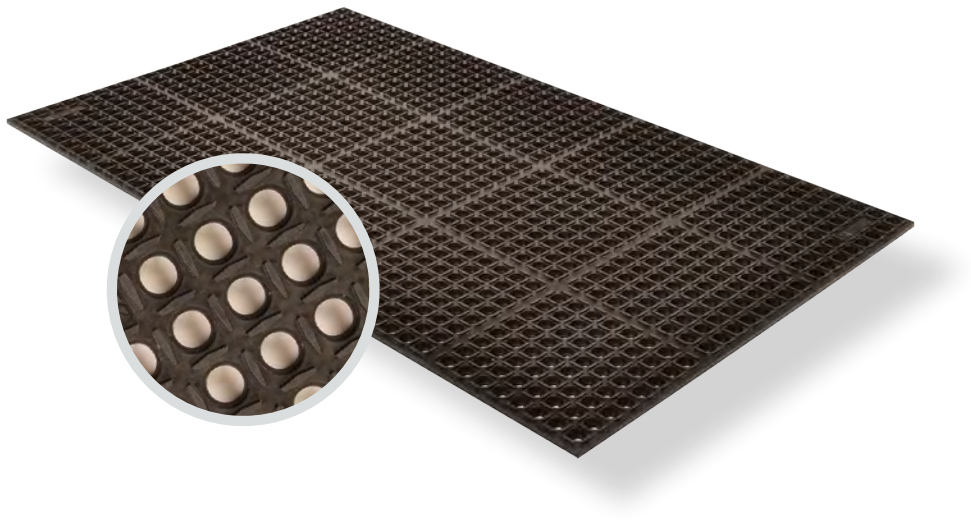

543 - CUSHION-TRED™ is made from a resilient rubber compound that can withstand many of the commonly found industrial chemicals, cutting fluids, oils, and greases. A large hole drainage system facilitates the removal of liquid and debris from the work area. Multiple mats can be affixed together with optional connector strips, and the modular design is compatible with the Notrax® M.D. Ramp System for on-site custom configurations.

Material: Rubber

Features and Benefits:

- Made from a heavy-duty resilient rubber compound
- Flexible cushioning design provides maximum comfort
- Large hole configuration facilitates drainage and resists clogging
- Square edges on all 4 sides

⚠ **WARNING:** This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is know to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov



MODEL: 543

APPLICATIONS


- Food Prep Areas
- Bar Areas
- Industrial Environment
- Assembly Lines

SPECIFICATIONS

Stock Sizes	2'x3', 3'x3', 3'x5'
Thickness	7/8"
Colors	Black

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

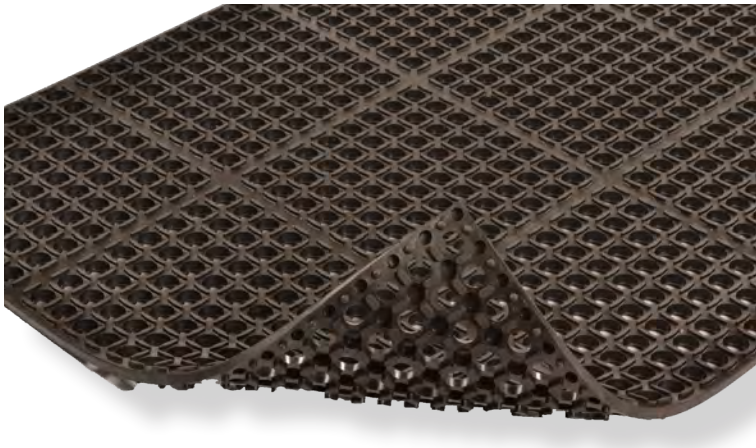



Anti-Fatigue Anti-Slip Drainage Cleaning

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.703" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.75
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	94.2% (average of 5 specimens)
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indentor forced into the material under specified conditions	63

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.