NOTRAX®

Justrite Safety Group

562 - SANITOP®

PRODUCT INFORMATION BROCHURE




Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

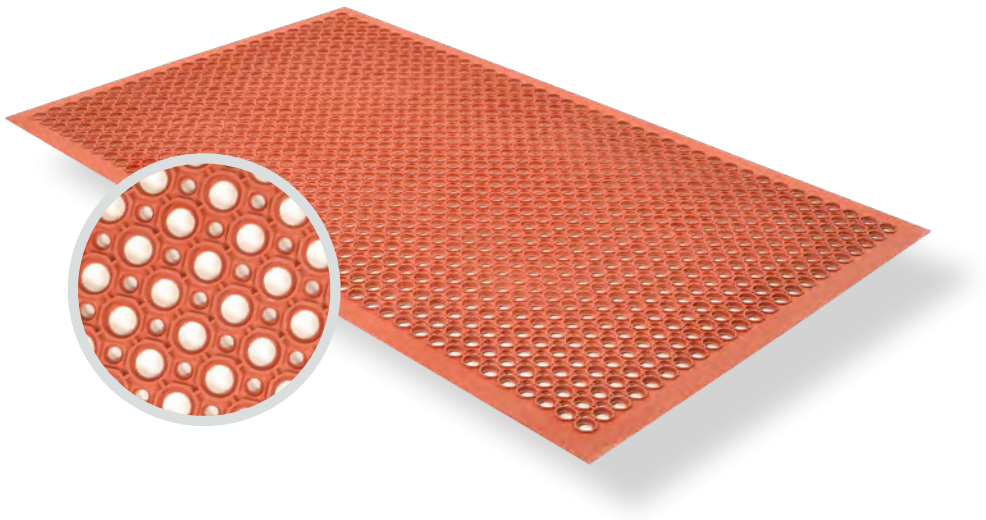


562 - SANITOP® is made from a durable rubber compound designed to withstand harsh chemicals while creating a slip resistant surface. A large and small hole drainage system channels liquid and debris away from the work area. Molded in beveled edges on all four sides eliminates trip hazards. Sanitop® offers a simple, economical solution for wet environments in many industrial or food service application.

Material: Rubber

Features and Benefits:

- Durable rubber compound
- Molded alternating large/small hole drainage system keeps moisture and debris free from work area
- Raised pattern surround large holes to channel drainage and provide worker traction.
- Beveled ramps on all 4 sides
- Available in 2 versions:
  - Black grease resistant mat
  - Red grease-proof nitrile mat

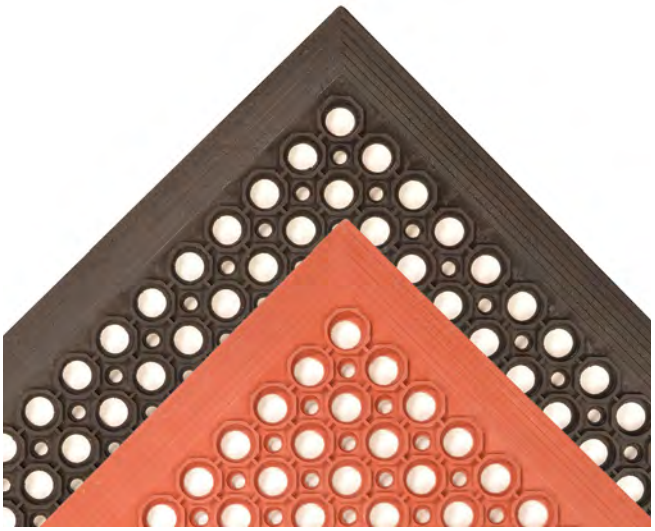

MODEL: 562

APPLICATIONS


- Wet environments that require basic fatigue relief.

SPECIFICATIONS

Stock Sizes	3'x5', 3'x10'*, 3'x20'* *Consists of multiple mats bonded together
Thickness	1/2"
Colors	Black, Red

Performance:

	Good	Better	Best	Superior
Wear Resistance				
Anti-fatigue Performance				
Slip Resistance				

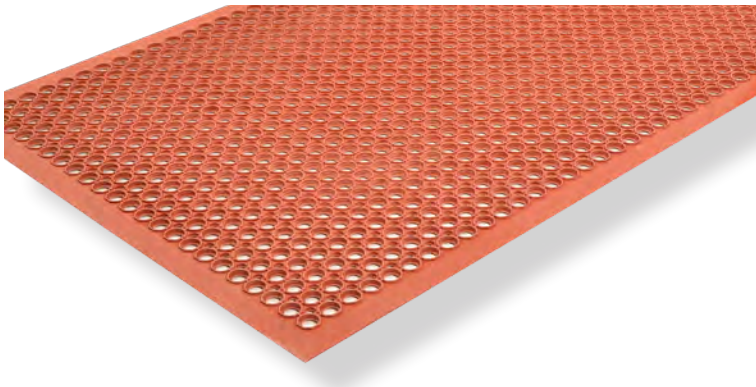

Cleaning · Anti-Fatigue · Anti-Slip · Drainage · Oil/Grease Resistant

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.780" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.67
Elongation ASTM D412	Test specimen is stretched at a specified rate until breaking point. The results are measured in weight needed to break, and % of size increase at breaking point.	227.7% (average of 5 specimens)
Hardness ASTM D2240-02	The hardness of a test sample is measured by means of a type A Shore Durometer. It measures the penetration of its specified indentor forced into the material under specified conditions	52

*Testing performed by an independent test laboratory.


NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com

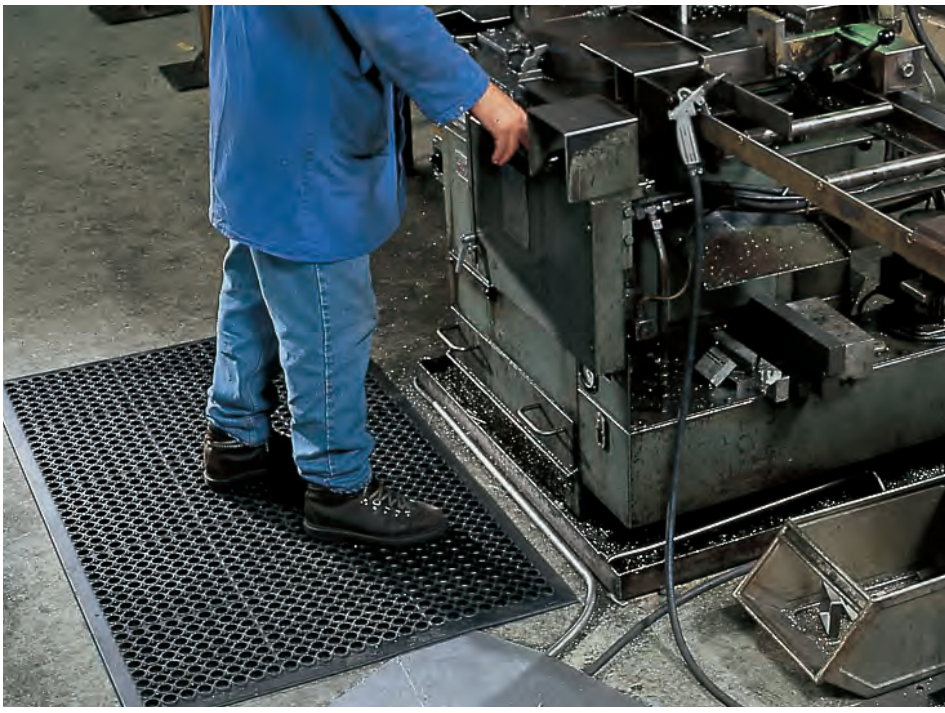

A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.