
NOTRAX®

Justrite Safety Group

755 - NIRU® VERSA RUNNER™

PRODUCT INFORMATION BROCHURE

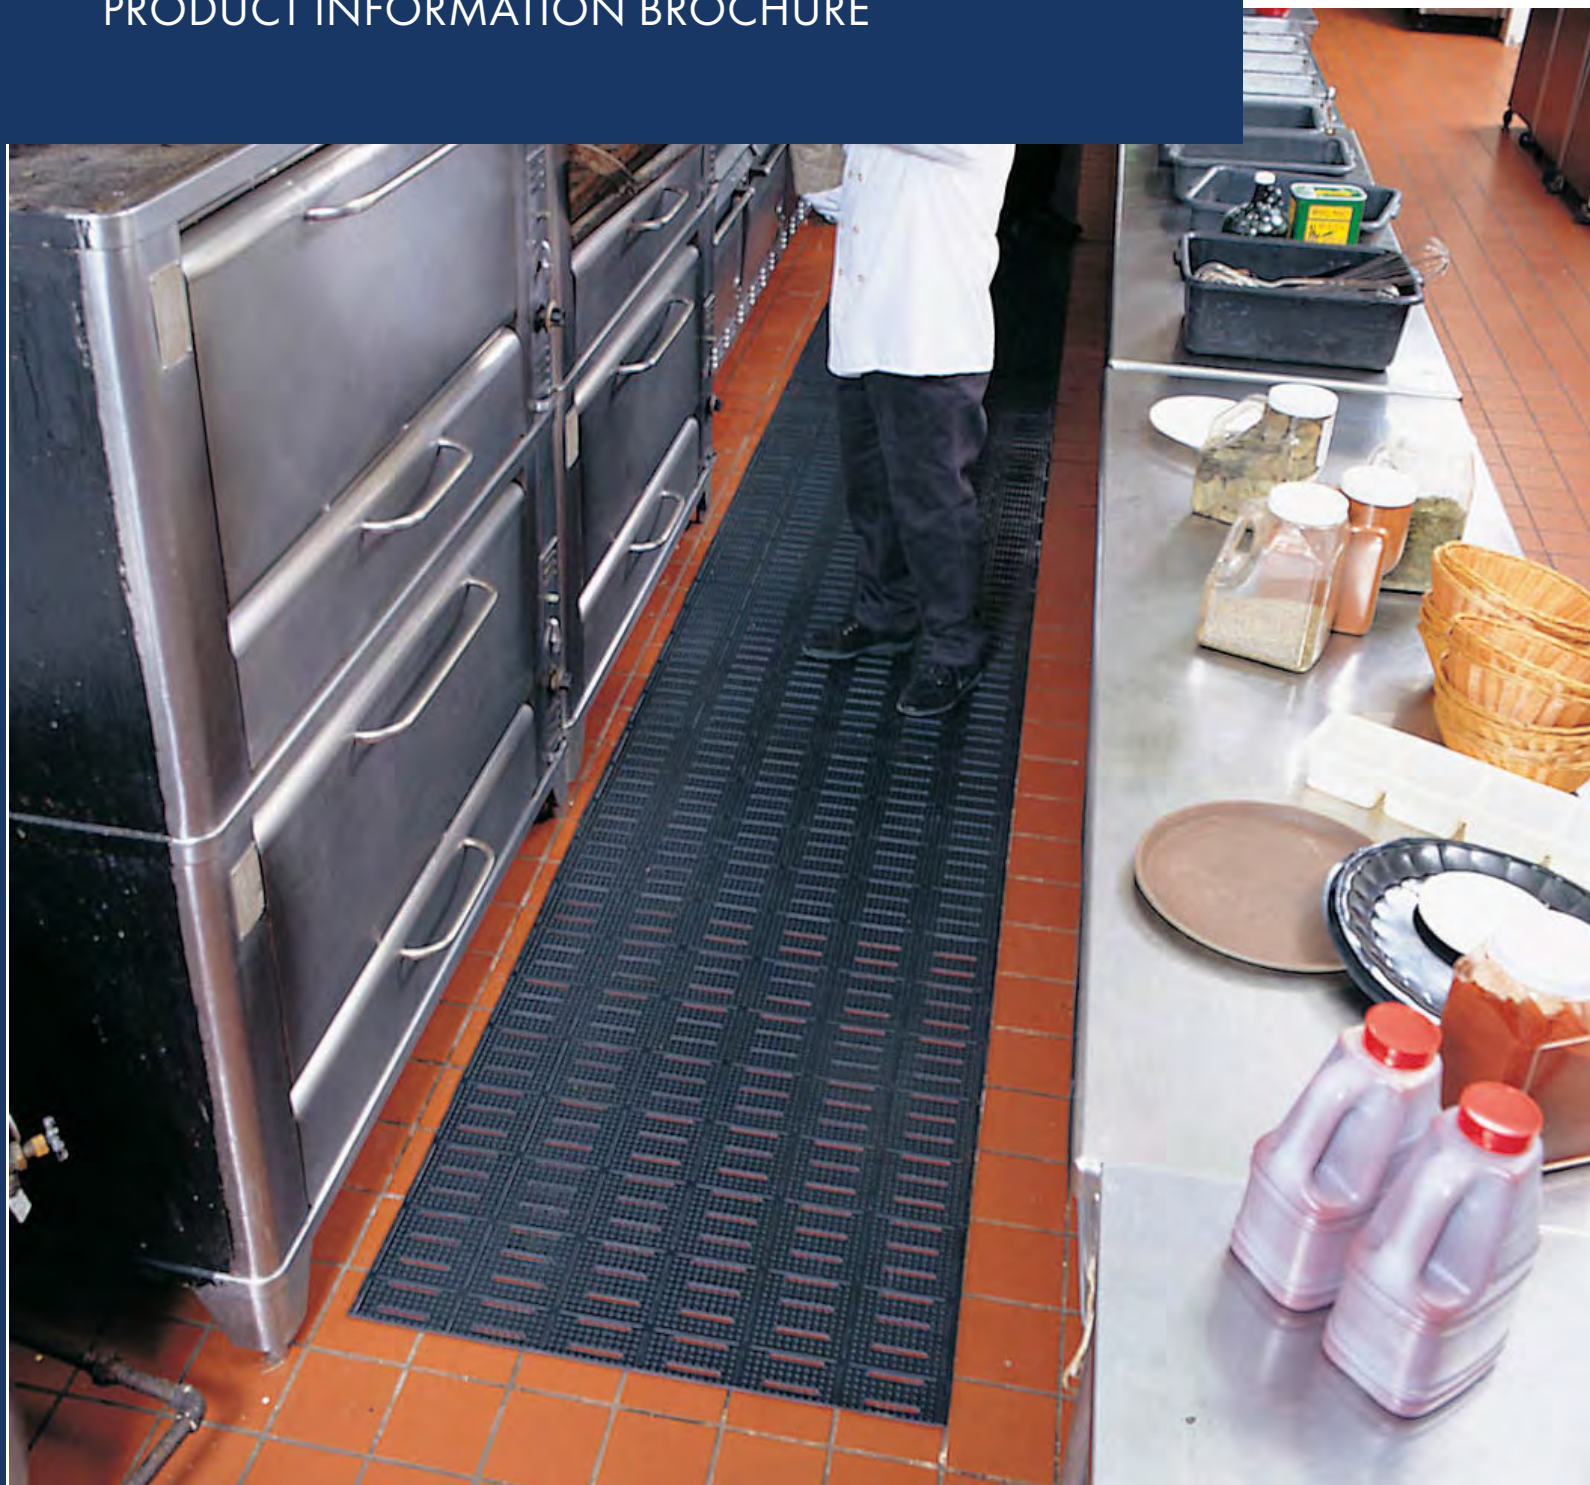

Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**




755 - NIRU® VERSA RUNNER™ is made from a 100% Nitrile rubber compound designed to withstand harsh chemicals, greases, oils, and animal fats while creating a slip resistant work surface. Slotted perforations allow for drainage and a scraper-rib design runs side-to-side on the mat for added traction. The ribbed underside enhances the anti-fatigue value of the mat and also helps to channel liquid away from the mat area. Its low profile allows for use in areas with high cart traffic. Manufactured with MicroStop® anti-microbial rubber compound.

Material: Nitrile Rubber

Features and Benefits:

- 100% Nitrile rubber compound
- Slotted perforations for drainage
- Ribbed underside channels liquid away from the mat
- MicroStop® anti-microbial rubber compound

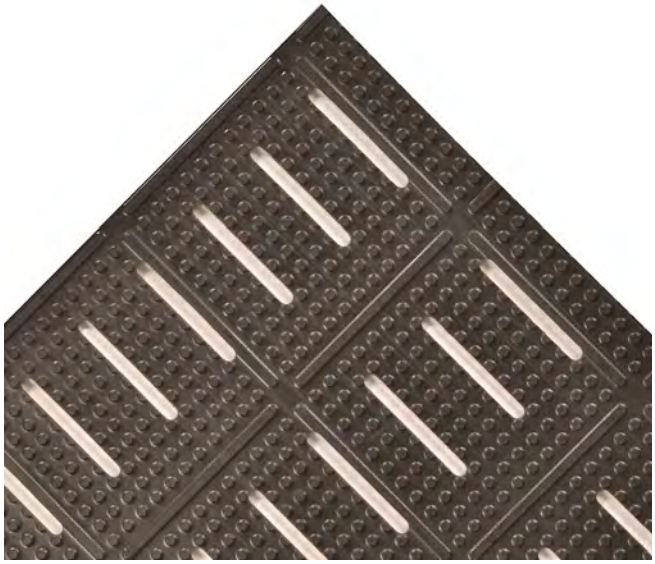

MODEL: 755


⚠ **WARNING:** This product can expose you to chemicals including diisodecyl phthalate which is known to the State of California to cause birth defects or reproductive harm, and 2-mercaptobenzothiazole which is know to the State of California to cause cancer. For more information, visit www.P65Warnings.ca.gov

APPLICATIONS

- Wet or dry environments that require high traction and drainage capability in a continuous mat. Low profile allows for use in applications with high cart traffic.

SPECIFICATIONS

Stock Sizes	2'x3', 3'x4',3'x5'
Roll Sizes	2'x60', 3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	2', 3' and 4' widths (up to 60' long)
Colors	Black

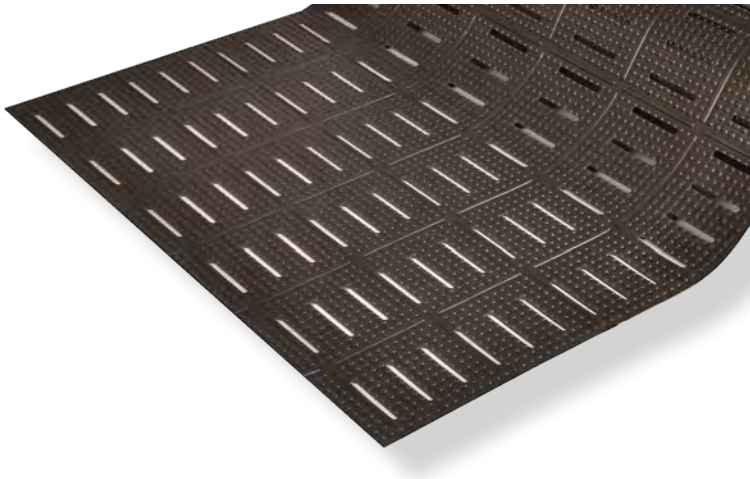

Performance:

	Good	Better	Best	Superior
Wear Resistance	■			
Anti-fatigue Performance	■			
Slip Resistance	■			

Floor Protection · Insulation · Food Processing · Food Service · Cut Lengths · Anti-Fatigue · Anti-Slip · Oil/Grease Resistant · Drainage

TESTING DATA

Test	Test Description	Results
ASTM D-624	Tear Strength	Die C - Min. 150 lbs/sq. in.
ASTM D-3884	Abrasion Resistance (Measured in weight loss)	@ 1,000 cycles - 1.21%
ASTM C-1028	Static Coefficient of Friction	Wet - 0.64 Dry - 0.79
ASTM D-2240	Durometer / Hardness	Shore A - 68
CPSC FF 1-70 ASTM D-2859	Surface Flammability of Carpets and Rugs Ignition Characteristics - Finished Textile Floor Covering Material	Pass
ASTM D-1171	Method A Ozone	No physical or appearance change

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.