NOTRAX®

Justrite Safety Group

825 - CUSHION STAT™ W/DYNA-SHIELD®

PRODUCT INFORMATION BROCHURE




Justrite Safety Group




For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

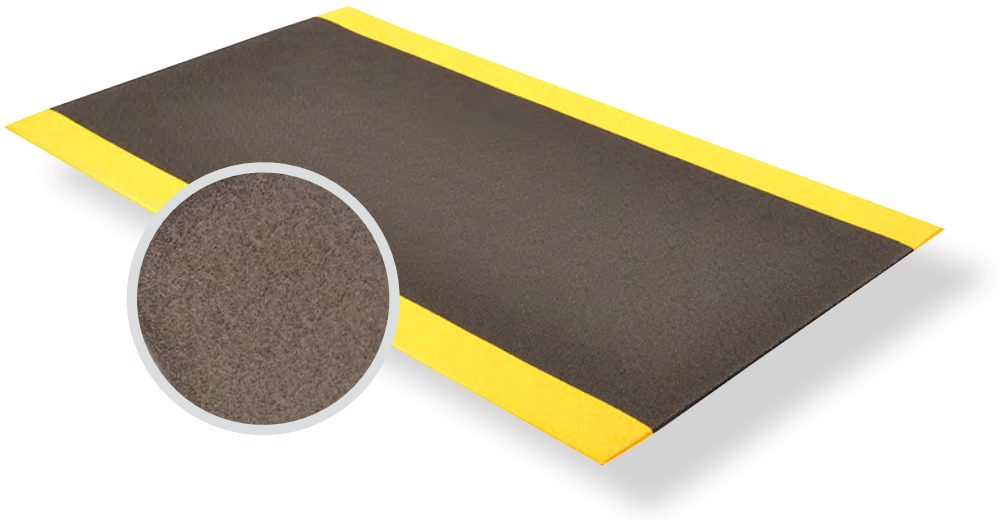

825 - CUSHION STAT™ W/DYNA SHIELD® is a dissipative/anti-static mat that is specially formulated to absorb static electricity keeping sensitive electronic circuitry safe from damage. The anti-fatigue properties are designed to provide traction with its non-directional pebble embossed top surface that allows for sure footing and is easy to sweep clean. The Notrax® exclusive Dyna-Shield® PVC sponge is manufactured with a tough protective top layer that provides long lasting wear and outperforms the competition in tear resistance and tensile strength. Designed for use in medium duty dry work areas.

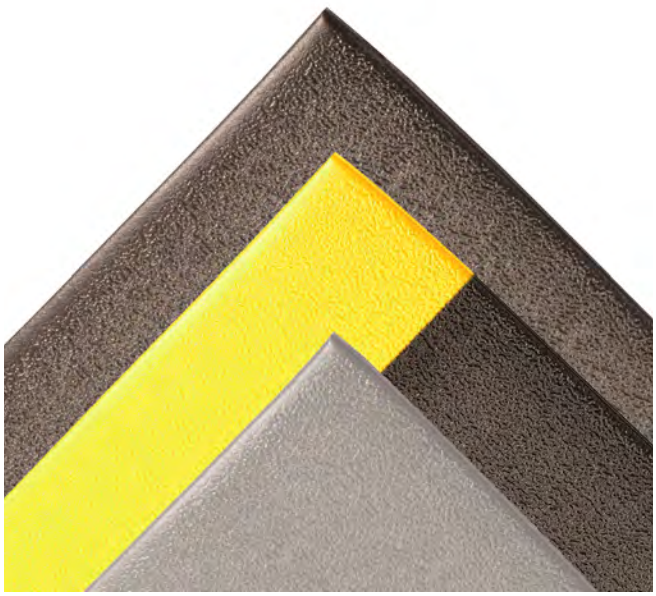

MODEL: 825

Material: PVC

Features and Benefits:


- Static dissipative PVC sponge
- Absorbs static electricity keeping sensitive electronic circuitry safe
- Non-directional pebble textured embossed mat
- PVC foam provides added cushioning comfort
- Exclusive Dyna-Shield® top surface manufactured directly into the mat for long lasting wear
- Superior tear resistance and tensile strength
- Beveled edges on all 4 sided
- RG 10^6 - 10^9 Ω; RP 10^6 - 10^9 Ω
- Grounding cord available, not required

APPLICATIONS

- Assembly Lines
- Testing Areas
- Electronic Areas
- Workstations

SPECIFICATIONS

Stock Sizes	2'x3', 3'x5', 3'x10'
Roll Sizes	3'x60', 4'x60'
Thickness	3/8"
Cut Lengths	3', and 4' widths (up to 60' long)
Colors	Black, Black/Yellow, Grey

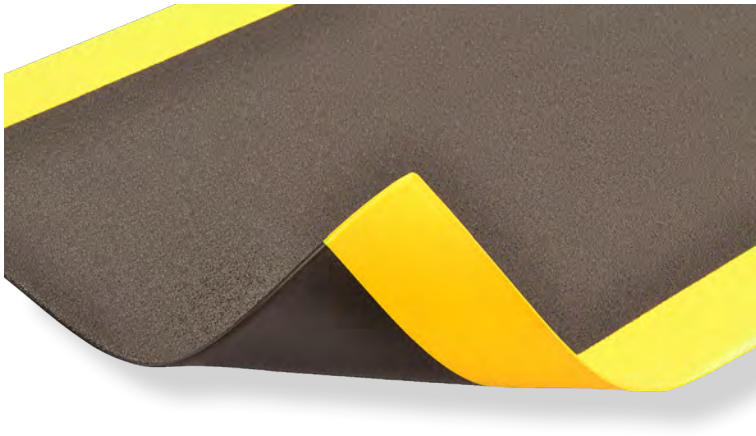

Performance:	Good	Better	Best	Superior
Wear Resistance		■		
Anti-fatigue Performance		■		
Slip Resistance		■		

Anti-Fatigue · Anti-Slip · Anti-static · Custom · Insulation

TESTING DATA

Test	Test Description	Results
-	Compression Deflection	@ 20 lbs/in2: 0.250 @ 40 lbs/in2: 0.283
ASTM C1028-96	Coefficient of Friction	.79
ASTM D3884-01	Abrasion Resistance	5.06 Grams
ASTM D412	Elongation	125%
ANSI/ESD 7.1	Protection of Electrostatic Discharge of Susceptible Items - Flooring Materials (50% relative humidity)	Surface/Ground: Avg: 1.6 x 107 Ohms Surface/Surface: Avg: 2.6 x 107 Ohms

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.