
NOTRAX®

Justrite Safety Group

T47 - PLASTI-TILE™

PRODUCT INFORMATION BROCHURE

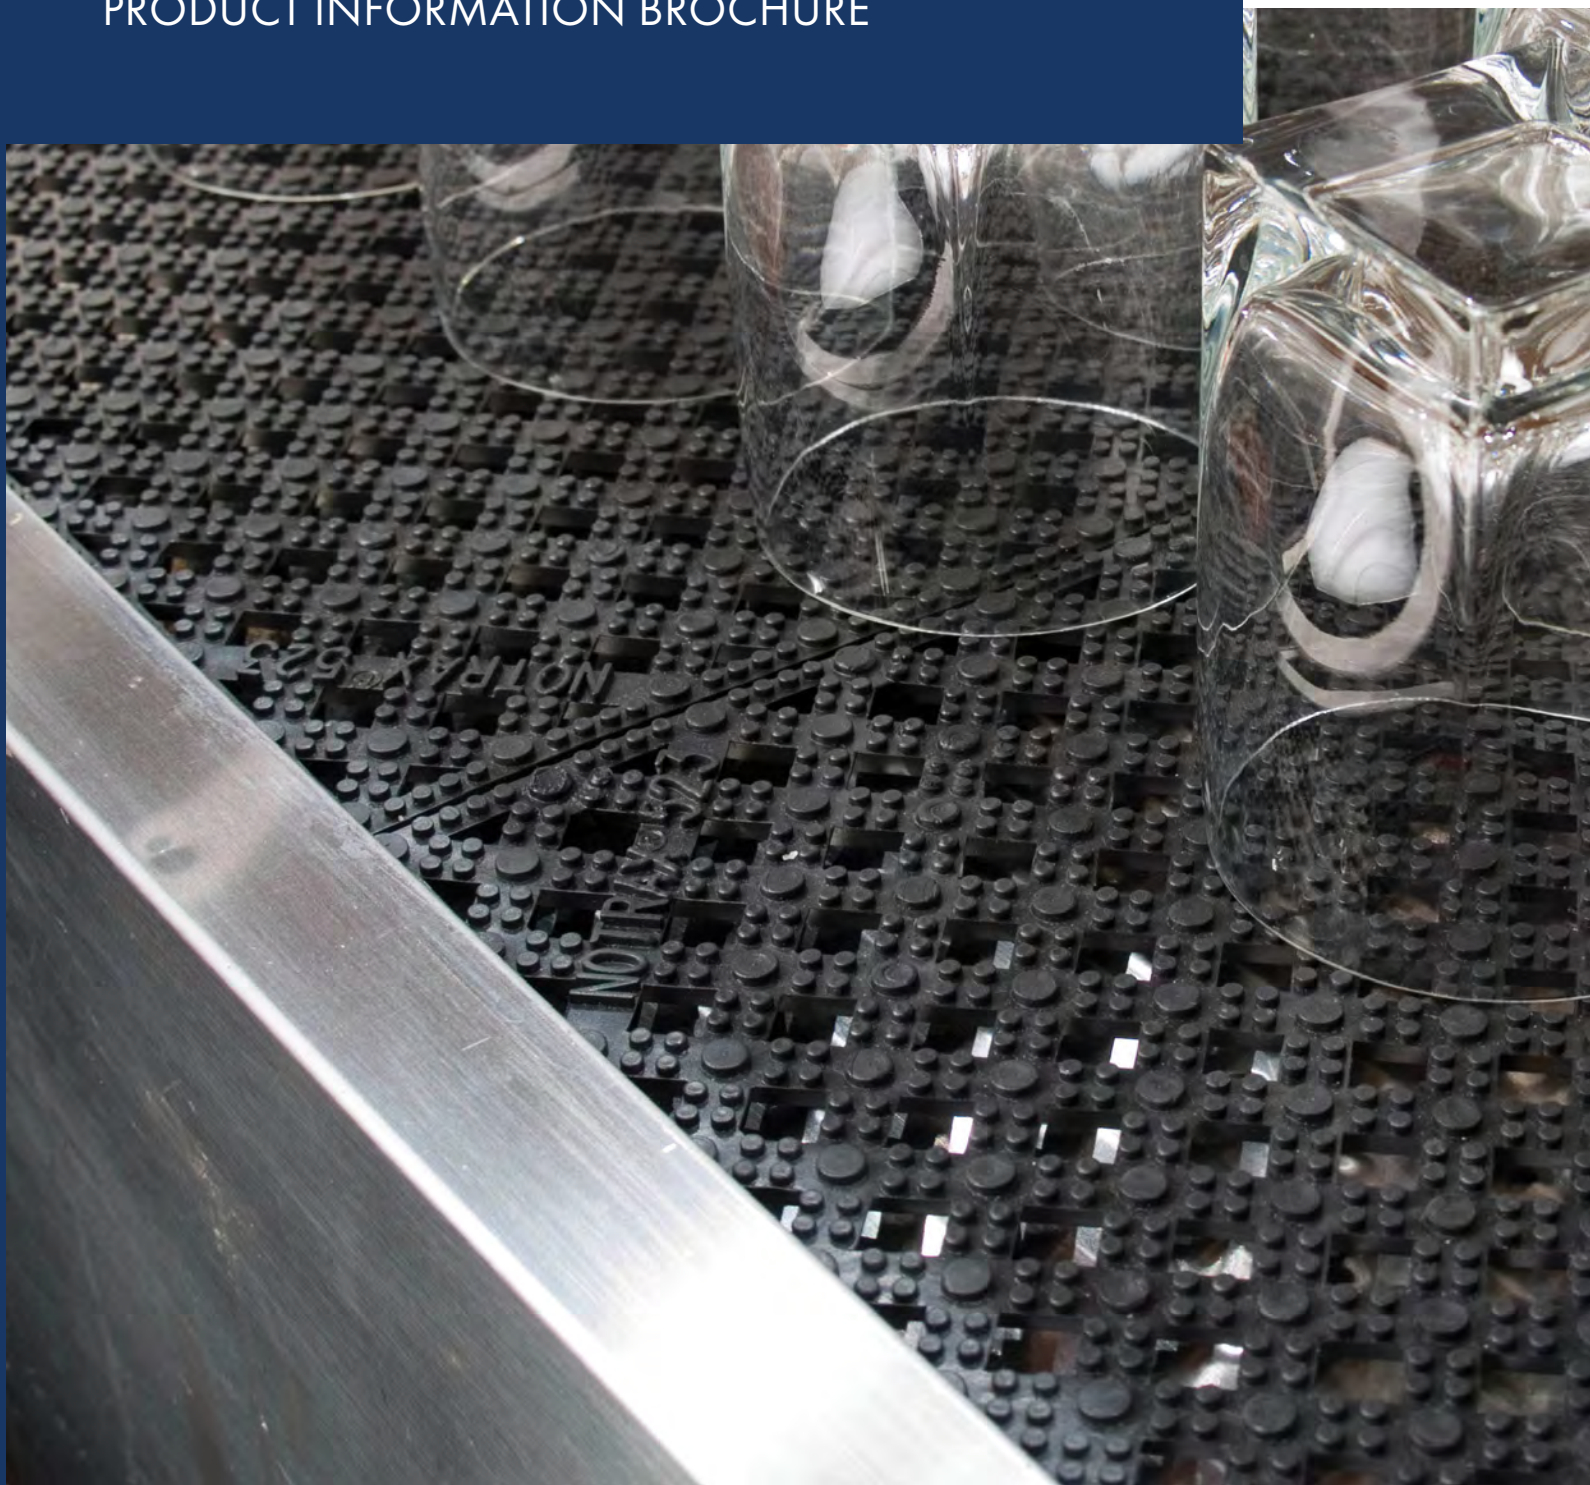


Justrite Safety Group



For over 70 years, the name Notrax® has meant superior quality, service, and innovative products. Now this brand is a cornerstone of Justrite Safety Group, offering the widest selection of products to a variety of markets and applications including entrance mats, anti-fatigue/safety mats, and products designed specifically for use in professional food service environments. Notrax® offers a complete selection of floor matting options to meet any application requirement, quality expectation, and budget.

- **Track record of manufacturing high quality mats for over seventy years**
- **All products are manufactured in ISO certified facilities**
- **Notrax® offers anti-fatigue matting, entrance matting, safety matting, food service matting and specialty mats designed for a variety of industries**

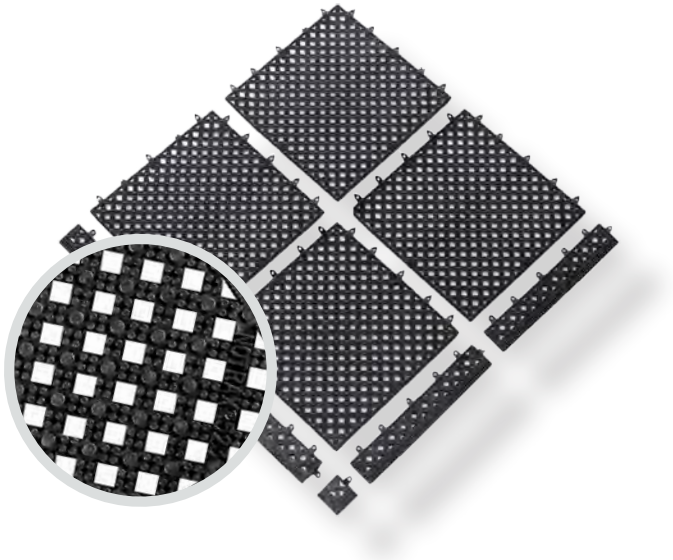


T47 - PLASTI-TILE™ with its open grid diamond pattern, Plasti-Tile™ allows moisture and debris to drain from the surface and aids traction. The modular cross-hatch PVC vinyl tiles snap together on-site for custom configurations. Its lightweight, modular design allows for additional use as shelf liners in food prep and bar areas.

Material: PVC

Features and Benefits:

- Lightweight PVC, modular, drainage tiles
- Raised diamonds on top surface facilitates drainage and aids traction
- Modular for any configuration
- 100% recycled PVC (Black only)
- NSF tested and certified (as shelf liners)
- Beveled ramps and corners available

⚠ **WARNING:** This product can expose you to chemicals including di-2-ethylhexyl phthalate and/or diisononyl phthalate which is known to the State of California to cause cancer, birth defects or reproductive harm. For more information, visit www.P65Warnings.ca.gov

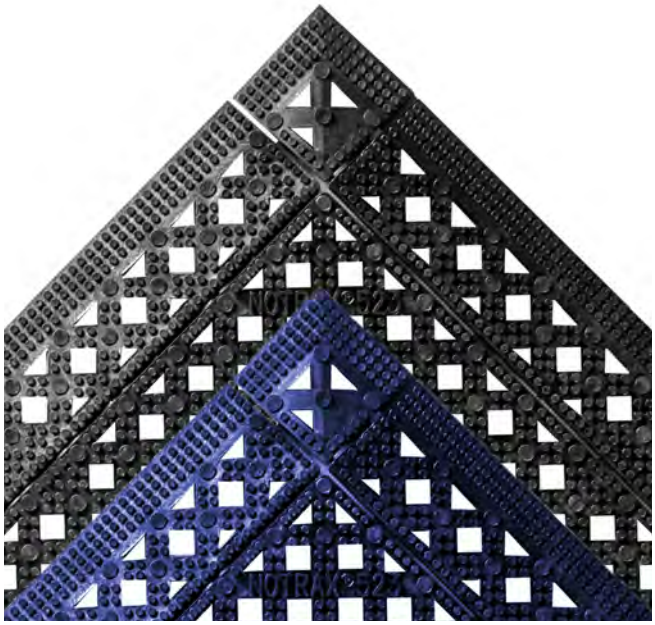


MODEL: T47

APPLICATIONS

- Shelving
- Bar Areas
- Restaurants
- Spa Areas

SPECIFICATIONS

Sizes	12"x12" Tile, 2"x12" Ramp, 2"x2" Corners
Thickness	1/2"
Colors	Black, Blue

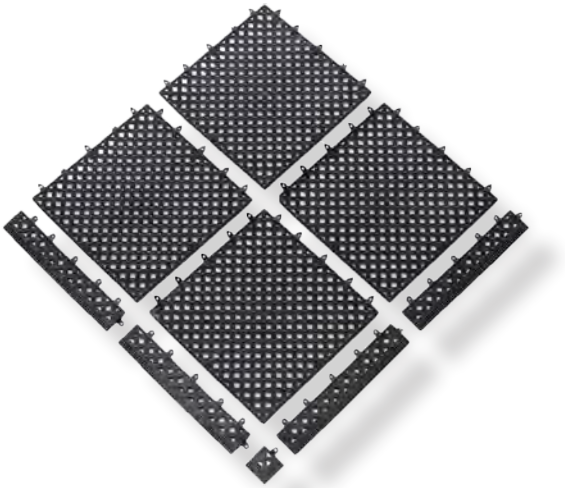

Anti-Static | Food Processing | Food Service | Anti-Fatigue | Anti-Slip | Cleaning | Custom | Drainage | Oil/Grease Resistant

TESTING DATA

Test	Test Description	Results
Compression Deflection	Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches)	.143" (40 lbs/sq. inch)
Coefficient of Friction ASTM C1028-96	A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip.	.71

*Testing performed by an independent test laboratory.

NOTRAX®
5655 West 73rd Street
Chicago, IL 60638

PHONE: (800) 621-2802

FAX: (800) 322-7105

EMAIL: saleschicago@checkers-safety.com

www.notrax.com



A PRODUCT OF: Justrite Safety Group

Justrite Safety Group is the leading source of safety equipment for flammables and hazardous materials storage and handling, asset protection, environmental protection spill containment, absorbents, specialized chemical storage, cable management, safety showers and eye/face washes, matting, and vehicle safety equipment. Learn more at Justrite.com, Checkers-safety.com, and Notrax.com.