
Superior Manufacturing Group, Inc.

# 520 Cushion-Lok™
## Anti-Fatigue/Anti-Slip Matting

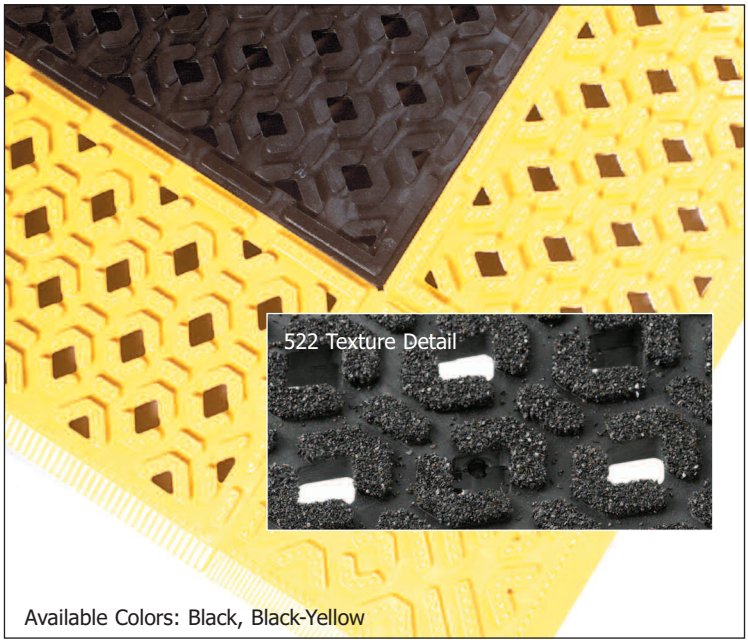


Available Colors: Black, Black-Yellow

NOTRAX® FLOOR MATTING

Good Better **Best** Superior




Cushion-Lok™ is a tough PVC based workstation mat developed by NOTRAX®, intended for wet environments where resistance to harsh industrial chemicals is a necessity. Cushion-Lok™ has hundreds of portholes to facilitate drainage while the worker is elevated on a series of blades to increase traction and keep the worker out of the spillage. The 522 model has a thick gritted layer applied to the top surface to add traction for extremely slippery environments.

| Test | Test Description | *Results |
|---|---|---|
| Compression Deflection | Test specimen is subjected to varying compression load levels and the resulting deflection was measured. The greater the deflection, the better the anti-fatigue properties. (Inches) | .251" (40 lbs/sq. inch) |
| Coefficient of Friction ASTM C1028-96 | A neolite heel assembly with a predetermined load is pulled horizontally with a dynamometer to measure the force required to cause the assembly to slip. | .76 |
| Abrasion Resistance ASTM D3884-01 | Test specimen is subjected to the rubbing action of two abrading wheels under controlled conditions. Results measured in Weight loss (Grams) | .22 Grams |
| Elongation ASTM D412 | Test specimen is stretched at a specified rate until breaking point. The results are measured in % of size increase at breaking point. | N/A |
| Critical Radiant Flux ASTM E648-94A | The test result is an average critical radiant flux (watts/square cm) which indicates the level of radiant heat energy required to sustain flame propogation in the flooring system. | .44 watts/square cm |

*All testing of NoTrax® floor matting has been performed by an independent testing laboratory.



Standard



Heavy Duty

Anti-Fatigue

Anti-Slip

Drainage

- Available in standard or heavy-duty (HD)
- Solid PVC vinyl construction: highly resistant to industrial chemicals
- Raised diamond porthole system facilitates drainage
- Overall thickness: 7/8"
- Six-inch wide beveled ramps are permanently affixed on 3 sides
- Stock Sizes: 30" x 36", 30" x 48", 30" x 60", 30" x 72", 30" x 96", 42" x 72", 42" x 96", 42" x 120"

