
# A555000

## Bantam I-Beam Sliding Anchorage Connector

## FEATURES

- Minimum Breaking Strength (MBS): 5,000 pounds
- Zinc plated steel, swivelling D-ring
- Compatible with beam flanges from 3½ inches to 14 inches wide, between ¼ to 1¼ inches thick
- Meets the requirements of ANSI Z359.18-2017
- Meets OSHA 1910.140 and 1926.502

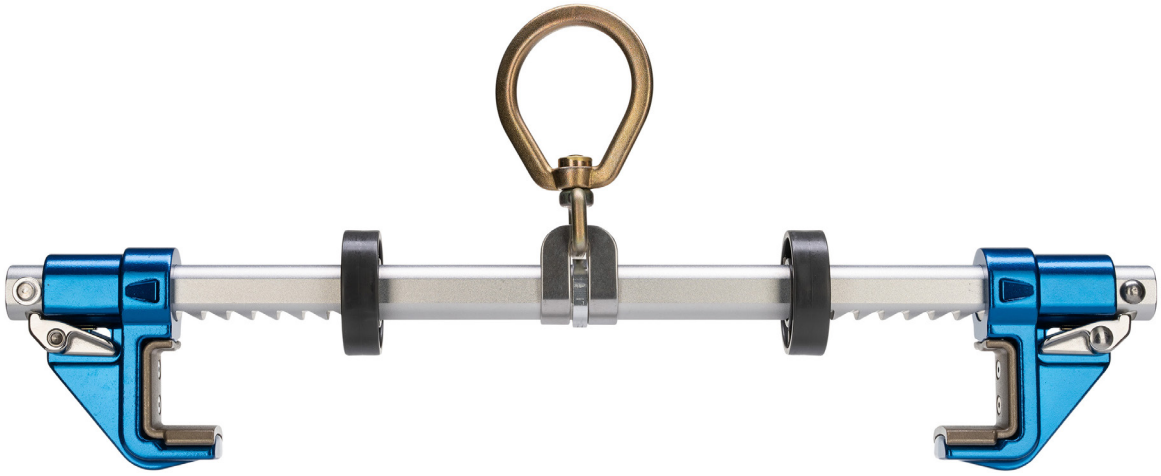

## SPECIFICATIONS

| Model No. | Bar Material | Connection Size | Minimum Breaking Strength (MBS) | Approx. Weight | Compliance Standards |
|---|---|---|---|---|---|
| A555000 | Aluminum | 2 ¼ in (57 mm) | 5,000 lbs (22.2 kN) | 3.3 lbs (1.5 kg) | ANSI Z359.18-2017 OSHA 1910 & 1926 |

**See User Instructions for more information.*

⚠ **WARNING:** Compliant fall protection equipment must only be used as it was designed and adhere to the hierarchy of controls as discussed in ANSI Z359.2. Users MUST read and follow all user instructions provided with the product. Before using a fall arrest system, users must be trained in the safe use of the system, as required by OSHA 29 CFR 1910.30 and 1926.503, or local safety regulations. Misuse or failure to heed these warnings and instructions may result in injury or even death.

WORK SAFE! WORK SMART!

# Technical Data Sheet

WernerCo Corporate Headquarters: 555 Pierce Road, Suite 300, Itasca, IL 60143
TEL: 888-523-3370 FAX: (724) 588-0315 www.wernerco.com

TDSA555000_REVB ©2021 Werner Co. 6/21