




Preassembled OSHA compliant
industrial swing gates

Easy as

~~123~~

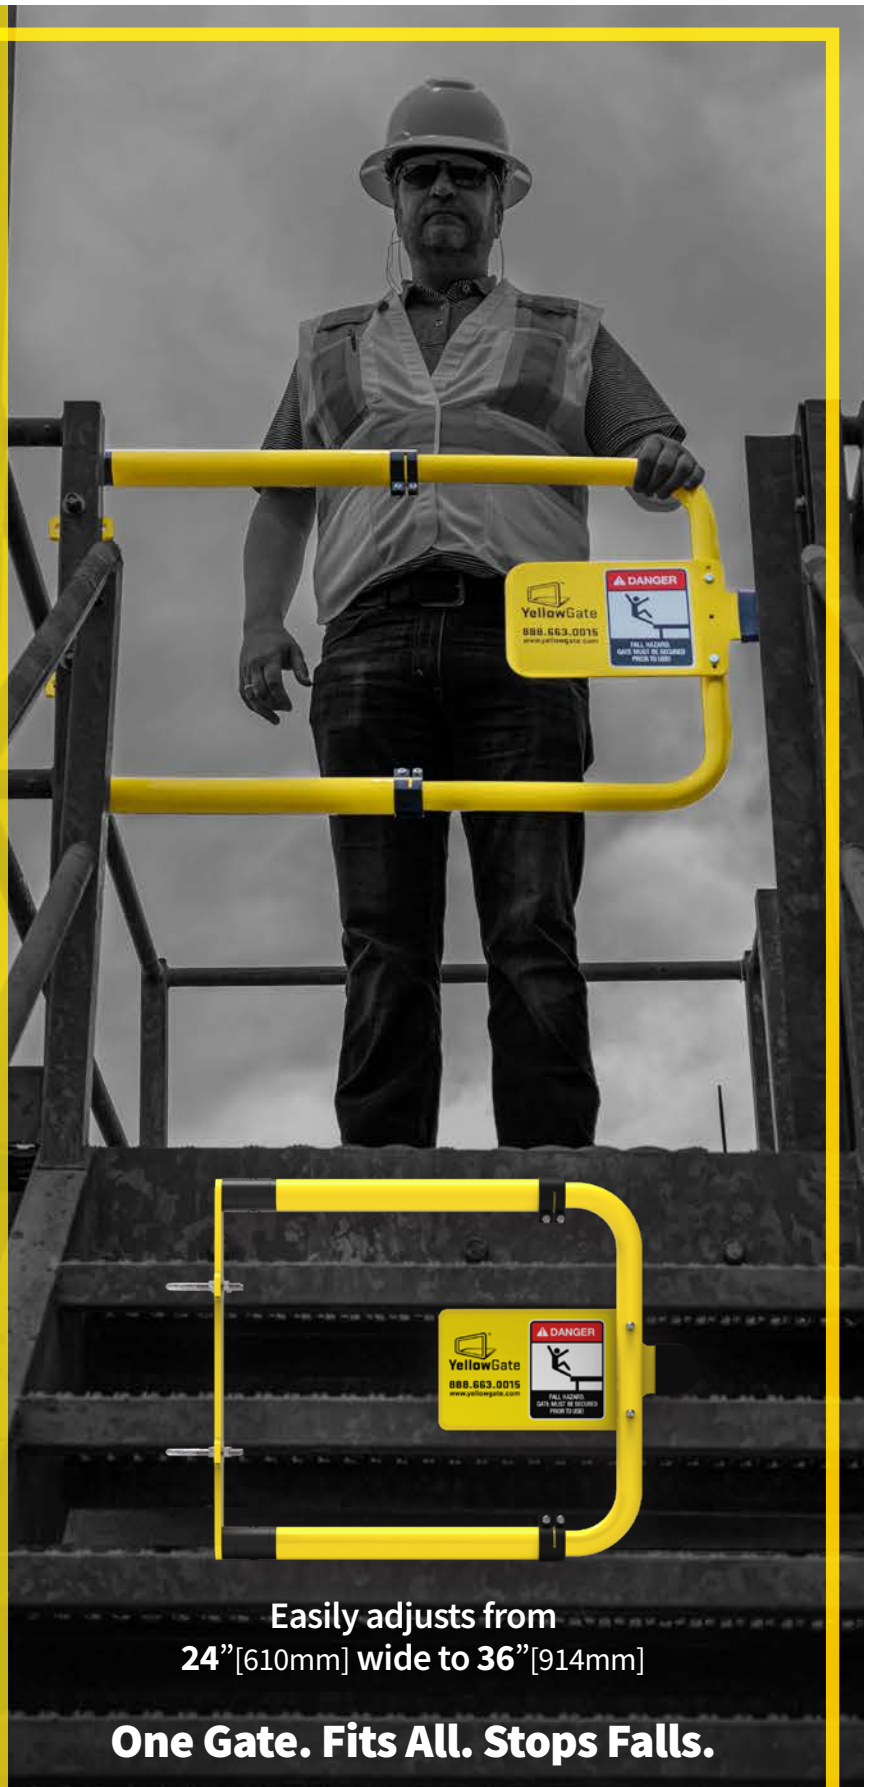

Easily adjusts from
24"[610mm] wide to 36"[914mm]

One Gate. Fits All. Stops Falls.



1.888.663.0015

YellowGate.com





YellowGate® Fall Protection

The Most Adjustable Swing Gate Available

- Universal mount for easy installation – no additional parts to order
- OSHA compliant
- Durable - built to last indoors and out
- In-stock and ready-to-ship



YellowGate 

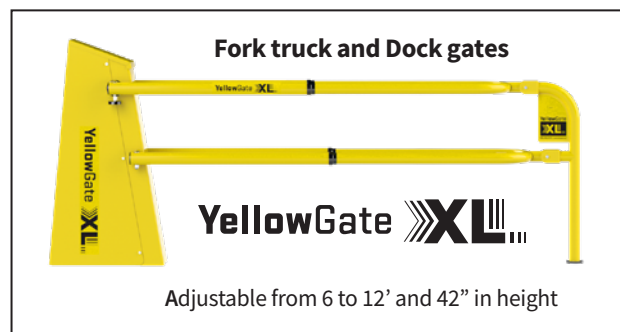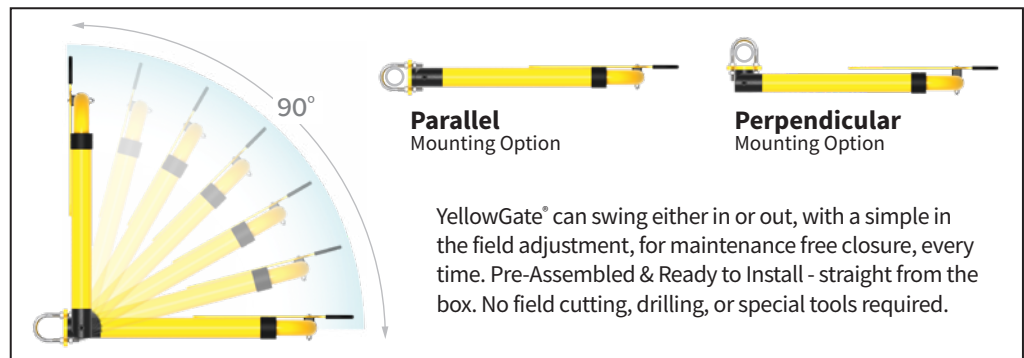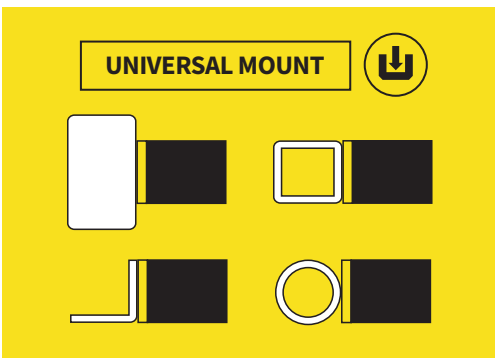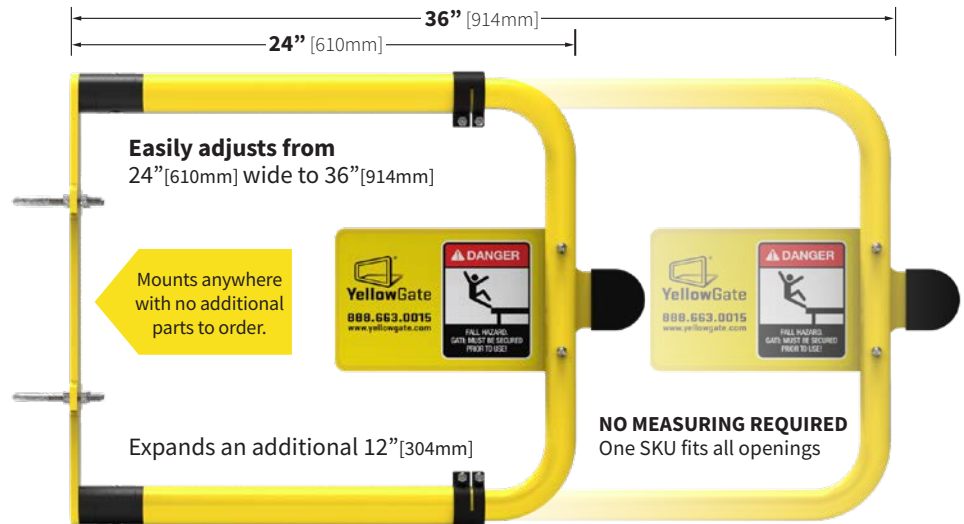

YellowGate XL

YellowGate Protection, only BIGGER Part No. 108490-XL



Each component is proudly crafted in our South Carolina facility.

On-site adjustable tension spring.

Three points of adjustment for optimized balance, light touch, smooth operation and easy action movement.

Powder coated safety yellow

The Most Adjustable Barrier Gate Available.

OSHA Compliant
Part No. 108490-XL

Durable weather protection design

Ultra lightweight.

Lifts and lowers almost effortlessly.

90° movement

▲ Easy action movement

Easily adjusts in the field from 6' (1829 mm) to 12' (3658 mm)

PRODUCT KEY FEATURES:

- ▶ Adjustable from 6' [1829 mm] -12' [3658 mm], 42" [1067 mm] height
- ▶ Powder coated safety yellow
- ▶ Aluminum extruded, laser precision manufactured
- ▶ Lightweight and easy to raise and lower
- ▶ Maintenance free ergonomic design
- ▶ Locking pin for both the open and closed positions

Available Power Option

Available with an optional 24 volt powered lift assist system, requiring a 120 volt power supply.

- Standard 50 ft. (customer to cut to desired length) cable run from controller to gate. (max. 150 ft.)
- Retro-fitable to existing manual YGXL rev3 models.
- Easy installation with basic tools
- Some electrical connection by customer required
- 15- 20 second, 90 degree raise or lower

Give us a call **888.663.0015**

visit us online **YellowGate.com**

YellowGate RS

Product Applications



- ▶ Simple design, for re-purposing rails for constantly changing structures and situations.
- ▶ No tools required. Quick release pins are used to attach the handrails to the base


- ▶ Only 3 individual handrail components
- ▶ Meets OSHA regulations: 1910.23 (e)(1); 1910.23 (e)(3)(ii); 1910.23 (e)(3)(iv); 1910.144 (a)(3) "yellow"

- ▶ 2" (51mm) handrail diameter
- ▶ Highly Mobile with 5" (127mm) rubber wheels
- ▶ Maintenance free ergonomic design

YellowGate RS



Each component is proudly crafted in our South Carolina facility.

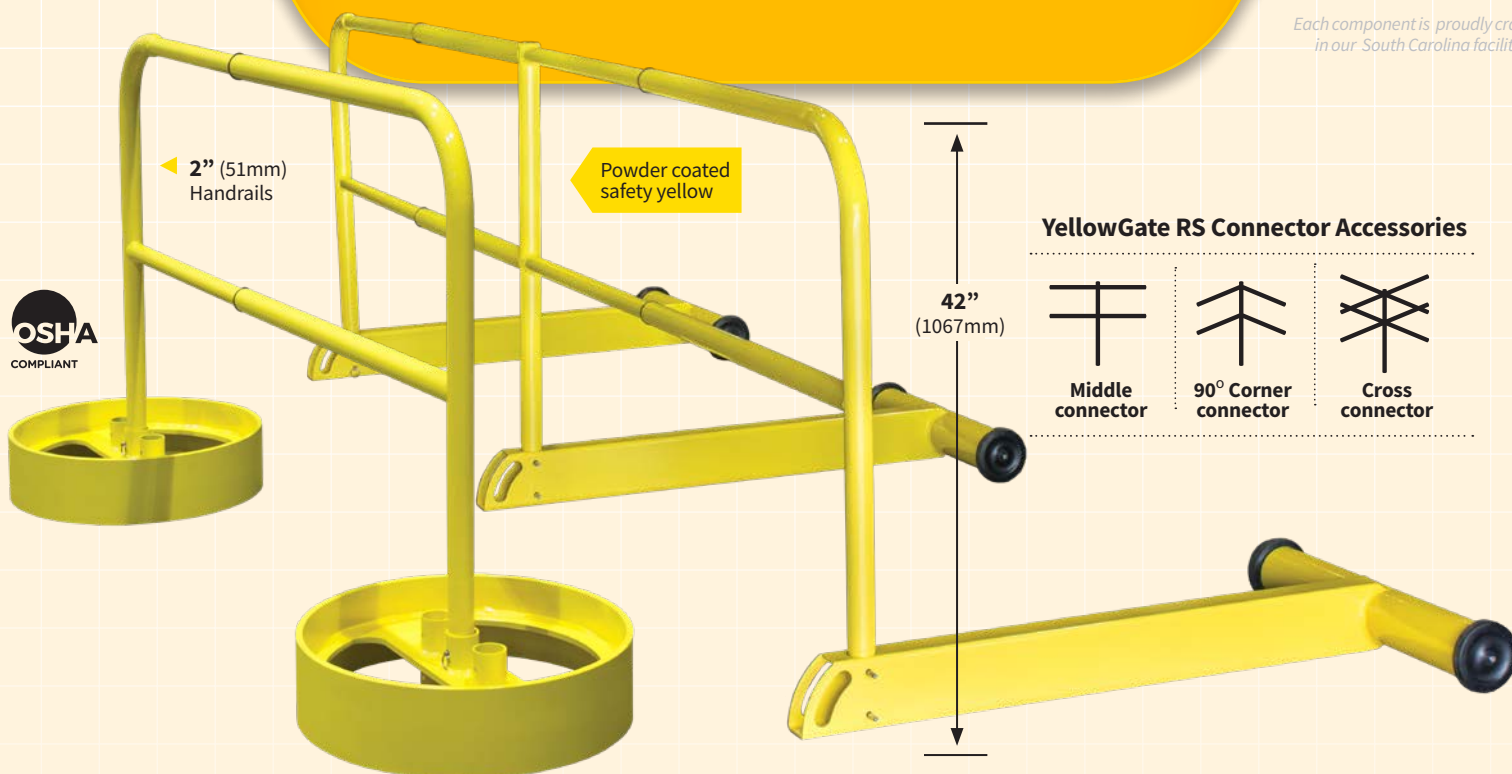

YellowGate RS Connector Accessories



PRODUCT KEY FEATURES:

- ▶ No Tools required. Rail anchors use quick release stainless steel pins
- ▶ Field adjustable and mobile
- ▶ OSHA Compliant 42" height
- ▶ Powder coated safety yellow
- ▶ Aluminum extruded, laser precision manufactured parts
- ▶ Maintenance free ergonomic design

Order Today!

PRODUCT	SKU#
T Base.....	Part No. 50732
Wheel Base.....	Part No. 50739
Handrail LH.....	Part No. 50734
Handrail RH.....	Part No. 50735
Handrail Corner.....	Part No. 50736
Handrail Cross.....	Part No. 50737
Handrail Middle.....	Part No. 50738



Look for our rooftop railing configurator
COMING SOON!