WALTER
Surface Technologies
Only the best.™

SPARK BACK TO BUSINESS!

JUNE 1 TO JULY 26, 2020



FREE!



Keeps your drill bits and screws close

SPECIAL OFFER!

For a limited time, receive a magnetic wrist band for every **50 eligible cut-off wheels or sanding discs** purchased from a participating WALTER distributor. Act now, these wrist band are only available until July 26, 2020 or while supplies last.

THE BEST ZIPCUT™ EVER!

IMPROVED CUTTING WHEEL PERFORMANCE

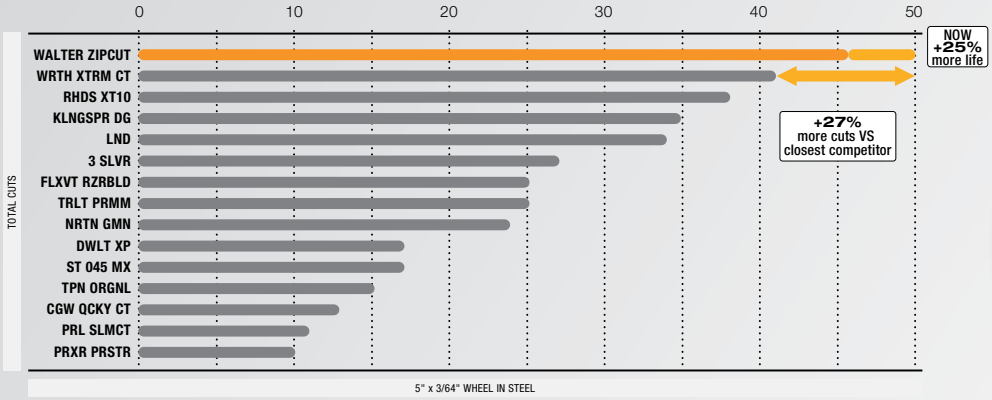

25% **More Productivity** with New & Improved **ZIPCUT**



- Longer product life: **More cuts!**
- Same **fast** cutting action
- Incredibly **comfortable**
- More rigid for **safety & control**
- Designed for :

Steel Stainless

ALL NEW XTRACUT™ SANDING DISC

HIGH PERFORMANCE CERAMIC GRAIN

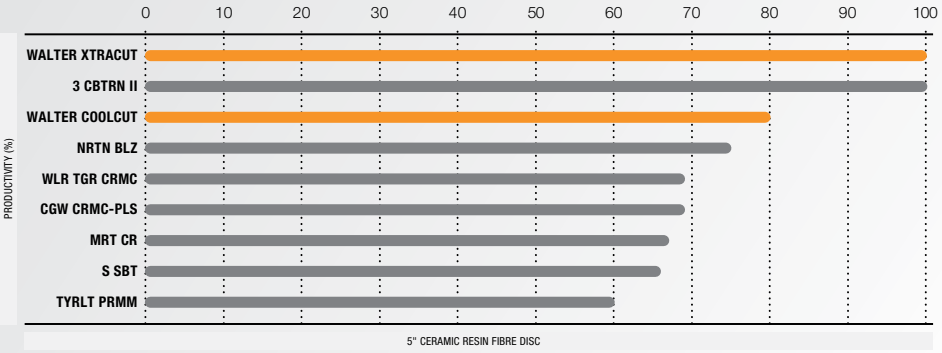

NEW **Best Total Cost in Use** with New **XTRACUT**



- New and **unique ceramic grain** blend
- Optimized for **high removal** in steel
- Microcrystalline structure
- **Better** productivity
- Performance **consistency**
- **Long** durability

CUTTING WHEELS

ZIPCUT™

IMPROVED

Safe, fast and reliable cutting



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	3/64"	7/8"	11-T 042	13,300	25
5"	3/64"	7/8"	11-T 052	12,200	25
6"	3/64"	7/8"	11-T 062	10,200	25
7"	1/16"	7/8"	11-T 072	8,600	25
*9"	5/64"	7/8"	11-T 092	6,600	25
TYPE 27					
4 ½"	3/64"	7/8"	11-T 142	13,300	25
5"	3/64"	7/8"	11-T 152	12,200	25
6"	3/64"	7/8"	11-T 162	10,200	25
7"	1/16"	7/8"	11-T 172	8,600	25
9"	5/64"	7/8"	11-T 192	6,600	25

Must be used with 3" clamping flange No. 30-B 022 (according to ANSI B7.1)

ZIP STAINLESS™

Contaminant-free wheel for use on stainless steel



Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	3/64"	7/8"	11-F 042	13,300	25
5"	3/64"	7/8"	11-F 052	12,200	25
6"	3/64"	7/8"	11-F 062	13,300	25
7"	1/16"	7/8"	11-F 072	8,600	25
*9"	5/64"	7/8"	11-F 092	6,600	25
TYPE 27					
4 ½"	3/64"	7/8"	11-F 142	13,300	25
5"	3/64"	7/8"	11-F 152	12,200	25
6"	3/64"	7/8"	11-F 162	13,300	25
7"	1/16"	7/8"	11-F 172	8,600	25
9"	5/64"	7/8"	11-F 192	6,600	25

Must be used with 3" clamping flange No. 30-B 022 (according to ANSI B7.1)

ZIP ALU™

Fast & free cutting on aluminum & other non-ferrous metals



Alu.

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	3/64"	7/8"	11-U 042	13,300	25
5"	3/64"	7/8"	11-U 052	12,200	25
6"	3/64"	7/8"	11-U 062	10,200	25
7"	1/16"	7/8"	11-U 072	8,600	25

COMBO ZIP™

Heavily reinforced for extra operator safety



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 27					
4 ½"	5/64"	7/8"	11-T 842	13,300	25
5"	5/64"	7/8"	11-T 852	12,200	25
6"	5/64"	7/8"	11-T 862	10,200	25

ZIP TiTAN™

Best solution for cutting titanium and brass



Ti Titanium Brass Ductile Cast Iron

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	3/64"	7/8"	11-H 042	13,300	25
5"	3/64"	7/8"	11-H 052	12,200	25
6"	3/64"	7/8"	11-H 062	10,200	25
7"	1/16"	7/8"	11-H 072	8,600	25

ZIP XXTREME™

Provides the lowest overall cost-per-cut



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	3/64"	7/8"	11-T 044	13,300	25
5"	3/64"	7/8"	11-T 054	12,200	25
6"	3/64"	7/8"	11-T 064	10,200	25
7"	1/16"	7/8"	11-T 074	8,600	25

ZIP+™ XTRA

For demanding applications on material 1/8" thickness +



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	1/16"	7/8"	11-T 242	13,300	25
5"	1/16"	7/8"	11-T 252	12,200	25
6"	1/16"	7/8"	11-T 262	10,200	25
7"	5/64"	7/8"	11-T 272	8,600	25
*9"	3/32"	7/8"	11-T 292	6,600	25
TYPE 27					
4 ½"	1/16"	7/8"	11-T 453	13,300	25
5"	1/16"	7/8"	11-T 503	12,200	25
6"	1/16"	7/8"	11-T 603	10,200	25

Must be used with 3" clamping flange No. 30-B 022 (according to ANSI B7.1)

ZIP ONE™

Quicker, easier cuts on thin gauge metal



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
4 ½"	1/32"	7/8"	11-T 542	13,300	25
5"	1/32"	7/8"	11-T 552	12,200	25
TYPE 27					
4 ½"	1/32"	7/8"	11-T 642	13,300	25
5"	1/32"	7/8"	11-T 652	12,200	25
6"	1/32"	7/8"	11-T 662	10,200	25
7"	3/64"	7/8"	11-T 672	8,600	25

ZIP™

Performance cutting with straight shaft and die grinder



Steel Stainless

Dia.	Thick.	Arbor	Order No.	Max RPM	Std. Pkg.
TYPE 1					
3"	1/32"	3/8"	11-L 303	25,470	25
3"	1/16"	3/8"	11-L 313	25,470	25
4"	1/32"	3/8"	11-L 403	19,100	25
4"	1/16"	3/8"	11-L 413	19,100	25
TYPE 27					
3"	1/32"	3/8"	11-L 308	25,470	25
4"	1/32"	3/8"	11-L 408	19,100	25



SPECIAL PRICING ALSO APPLIES TO

CHOPCUT™, RIPCUT™, PORTACUT™ AND RAILCUT II™

AVAILABLE AT PARTICIPATING DISTRIBUTORS.

SANDING DISCS

XTRACUT™

NEW

Highest performance sanding disc in steel



Steel

Dia.	Arbor	Grit	Equivalent Grit	Order No.	Std. Pkg.
4 ½"	⅞"	X-COARSE	36+	15-A 453	25
4 ½"	⅞"	COARSE	60+	15-A 456	25
4 ½"	⅞"	MEDIUM	80+	15-A 458	25
5"	⅞"	X-COARSE	36+	15-A 503	25
5"	⅞"	COARSE	60+	15-A 506	25
5"	⅞"	MEDIUM	80+	15-A 508	25
7"	⅞"	X-COARSE	36+	15-A 703	25
7"	⅞"	COARSE	60+	15-A 706	25
7"	⅞"	MEDIUM	80+	15-A 708	25

COOLCUT XX™

The longest lasting, most aggressive sanding discs



Steel Stainless Alu. + n.f. metals

Dia.	Arbor	Grit	Order No.	Std. Ctn.	Std. Pkg.
4 ½"	⅞"	24	15-X 452	25	250
4 ½"	⅞"	36	15-X 453	25	250
4 ½"	⅞"	50	15-X 455	25	250
4 ½"	⅞"	60	15-X 456	25	250
4 ½"	⅞"	80	15-X 458	25	250
4 ½"	⅞"	100	15-X 460	25	250
4 ½"	⅞"	120	15-X 462	25	250
5"	⅞"	24	15-X 502	25	250
5"	⅞"	36	15-X 503	25	250
5"	⅞"	50	15-X 505	25	250
5"	⅞"	60	15-X 506	25	250
5"	⅞"	80	15-X 508	25	250
5"	⅞"	100	15-X 510	25	250
5"	⅞"	120	15-X 512	25	250
6"	⅞"	24	15-X 602	25	250
6"	⅞"	36	15-X 603	25	250
6"	⅞"	50	15-X 605	25	250
6"	⅞"	60	15-X 606	25	250
6"	⅞"	80	15-X 608	25	250
6"	⅞"	100	15-X 610	25	250
6"	⅞"	120	15-X 612	25	250
7"	⅞"	24	15-X 702	25	250
7"	⅞"	36	15-X 703	25	250
7"	⅞"	50	15-X 705	25	250
7"	⅞"	60	15-X 706	25	250
7"	⅞"	80	15-X 708	25	250
7"	⅞"	100	15-X 710	25	250
7"	⅞"	120	15-X 712	25	250

COOLCUT XX™ Quick-Change



SPIN-ON

Dia.	Arbor	Grit	Order No.	Std. Ctn.	Std. Pkg.
4 ½"	⅞"	36	15-X 473	25	250
4 ½"	⅞"	50	15-X 475	25	250
4 ½"	⅞"	60	15-X 476	25	250
4 ½"	⅞"	80	15-X 478	25	250
4 ½"	⅞"	120	15-X 482	25	250
5"	⅞"	36	15-X 523	25	250
5"	⅞"	50	15-X 525	25	250
5"	⅞"	60	15-X 526	25	250
5"	⅞"	80	15-X 528	25	250
5"	⅞"	120	15-X 532	25	250
7"	⅞"	36	15-X 723	25	250
7"	⅞"	60	15-X 726	25	250
7"	⅞"	80	15-X 728	25	250
7"	⅞"	120	15-X 732	25	250

Certain dimensions of ***COOLCUT XX*** and ***COOLCUT XX QUICK-CHANGE*** are available in pack of 50 discs. See order form for complete listing.

COOLCUT™

General purpose sanding



Steel

Dia.	Arbor	Grit	Order No.	Std. Ctn.	Std. Pkg.
4 ½"	⅞"	24	15-C 452	25	250
4 ½"	⅞"	36	15-C 453	25	250
4 ½"	⅞"	40	15-C 454	25	250
4 ½"	⅞"	50	15-C 455	25	250
4 ½"	⅞"	60	15-C 456	25	250
4 ½"	⅞"	80	15-C 458	25	250
4 ½"	⅞"	100	15-C 460	25	250
4 ½"	⅞"	120	15-C 462	25	250
5"	⅞"	24	15-C 502	25	250
5"	⅞"	36	15-C 503	25	250
5"	⅞"	40	15-C 504	25	250
5"	⅞"	50	15-C 505	25	250
5"	⅞"	60	15-C 506	25	250
5"	⅞"	80	15-C 508	25	250
5"	⅞"	100	15-C 510	25	250
5"	⅞"	120	15-C 512	25	250
7"	⅞"	24	15-C 702	25	250
7"	⅞"	36	15-C 703	25	250
7"	⅞"	40	15-C 704	25	250
7"	⅞"	50	15-C 705	25	250
7"	⅞"	60	15-C 706	25	250
7"	⅞"	80	15-C 708	25	250
7"	⅞"	100	15-C 710	25	250
7"	⅞"	120	15-C 712	25	250

TOPCUT™

Top of the line in finishing applications



Steel Stainless

Dia.	Arbor	Grit	Order No.	Std. Pkg.	Std. Ctn.
4 ½"	⅞"	24	15-P 452	25	250
4 ½"	⅞"	36	15-P 453	25	250
4 ½"	⅞"	60	15-P 456	25	250
4 ½"	⅞"	80	15-P 458	25	250
5"	⅞"	24	15-P 502	25	250
5"	⅞"	36	15-P 503	25	250
5"	⅞"	60	15-P 506	25	250
5"	⅞"	80	15-P 508	25	250
7"	⅞"	24	15-P 702	25	250
7"	⅞"	36	15-P 703	25	250
7"	⅞"	60	15-P 706	25	250
7"	⅞"	80	15-P 708	25	250

Available at:

*Certain conditions apply. Additional skus may be eligible. See your participating Walter distributor or contact your Walter Territory Manager for details. Walter Surface Technologies Inc.© 2020 All Rights Reserved. Limited time offer, while quantities last. All taxes extra. June 1 – July 26, 2020.