**Severe personal injury and property damage can result from improper installation or assembly.**

**Read the following warming carefully before beginning.**

- **Products must be installed by professional or installer.**
- **If you do not understand the instructions or have any concerns or questions, please contact a qualified local installer.**
- **Do not install or assemble if the product or hardware is damaged or missing, if you require replacement parts, please contact you local distributor for assistance.**
- **This product fits most 17"-30" LCD / monitor；maximum weight of LCD / monitor：9kg /19.8lbs.**
- **Installer-friendly and straight forward.**
- **For safe installation, the desk you are mounting to must support minimum 3 times the weight of the total load (the mount, the monitor and all accessories weight).**
- **Do not use this product for other than the original designed.**
- **This product contain moving parts, please use with caution.**
- **When installing monitor, please do not damage electrical wiring or power source.**
- **Installation and routing of monitor cables on the monitor bracket must comply with electro-technical regulations.**
- **Importantly,mains- and data cables must be secured against twisting and squeezing or shearing.**
- **The manufacturer will bear no responsibility to the desk of mounting, or incidental or consequential damages arising thereof.**
- **The manufacturer disclaims any liability for the modifications, improper installation, or installation over the specified weight range. The manufacturer will not be liable for any damages arising out of the use of , or inability to use, the product.**
- **This product is designed for indoor used only, use of this product outdoor could lead to product failer and severe personal injury.**
- **▲This product contains a high pressure gas spring, fire and percussion prohibited. Also it is strictly prohibited to dismantle without professionals. Please return to the manufacturer or hand over to professional agencies if the product is abandoned. In order to ensure the performance of gas spring, full direction adjustment of the product arm is recommended several times per month.**
- **▲ All images are for reference only. As product in kind prevail.**


**We reserve the right to modify or alter instructions. No modification or alteration without formal notice.**



OfficeSource® FURNITURE

Customer Service
Tel: 800-388-8202 (Mon-Fri | 9am-5pm EST.)
officesourcefurniture.com

***This assembly manual contains important safety information. Please read and keep for future reference.***

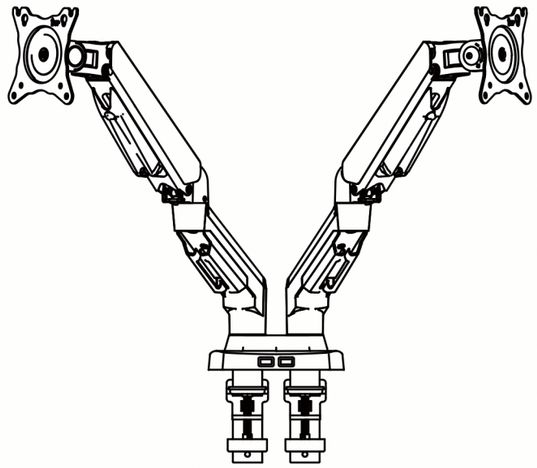


**Model No.:** OSAC4009
**Description:** Dual Monitor Arm with 1 USB-A, 1 USB-C

## Useful Hints Before You Start

1. Read each step carefully before starting.
2. Before beginning assembly, identify, sort and count the parts.
3. Using the wrong screw will cause damage.
4. Using incompatible hardware might cause damage to product.
5. It is important that each step is performed in correct order to avoid difficulties.
6. Assemble your furniture on packaging cardboard to prevent scratches or damage.
7. Do not tighten any screws or bolt until the unit is completely assembled.
8. Keep all hardware parts out of reach of children.

## Necessary Tools

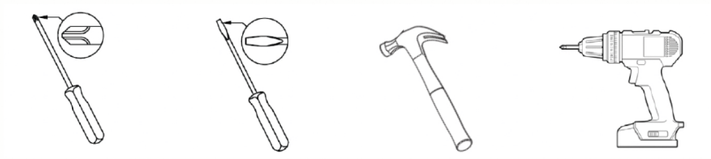

Phillips Screwdriver

Flat Head Screwdriver


Hammer

CAUTION – Risk of product damage! Power Drill can be used on lowest torque setting.

Distributed exclusively by COE Distributing!


Please read completely through the instructions and verify that all listed parts and hardware are present before beginning assembly.


## Hardware List

| | | | | | | |
|---|---|---|---|---|---|---|
| A  ×2 | B  ×1 | C  ×2 | D  M4×12-8pcs | E  M4×30-8pcs | F  M8×16-2pcs | |
| G  ×2 | H  ×1 | I  ×1 | J  ×1 | K  3mm ×1 | L  4mm ×1 | M  5mm ×1 |


**A. Installation methods:**

**A1.Table edge installation:**

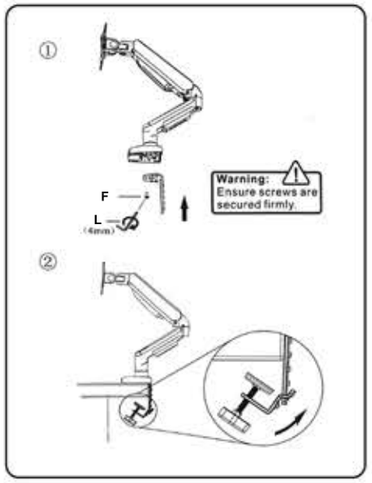


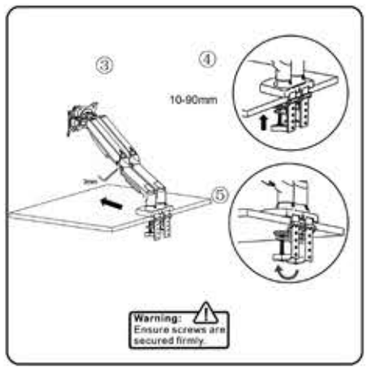

**A2.Grommet installation:**

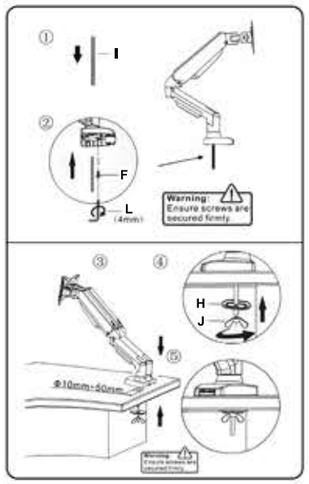



**Full adjustable after installation:**





**B.Directional usage guide:**

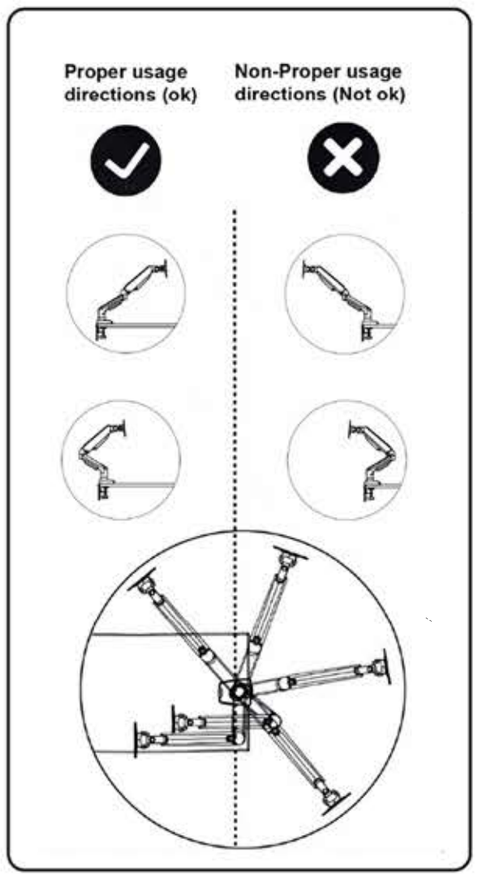



**C.Power and display lines installation**

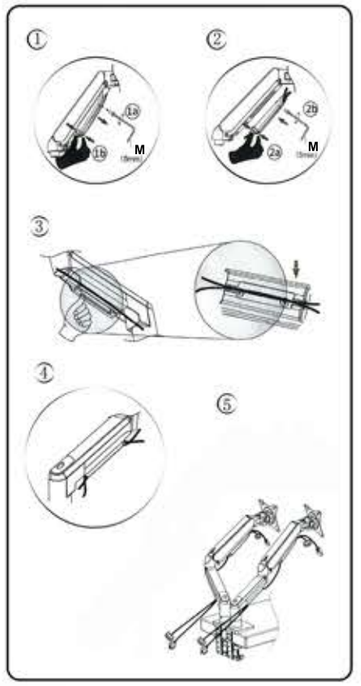


**D.Display installation**

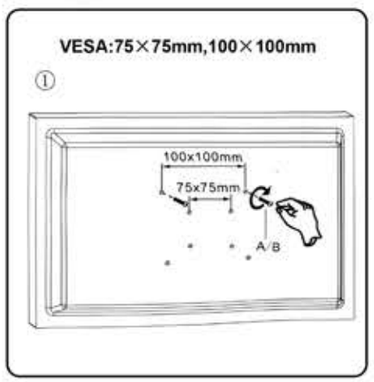


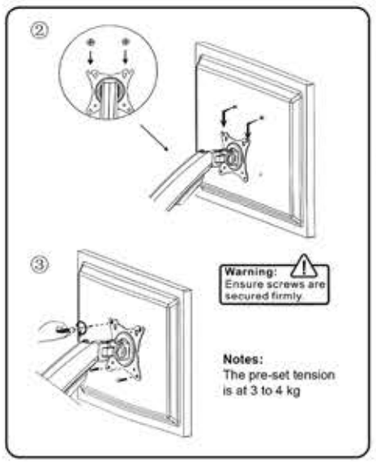
**E.Torque adjustable**

**"+":Torque increase direction shown fig-2**

**"-":Torque increase direction shown fig-2**

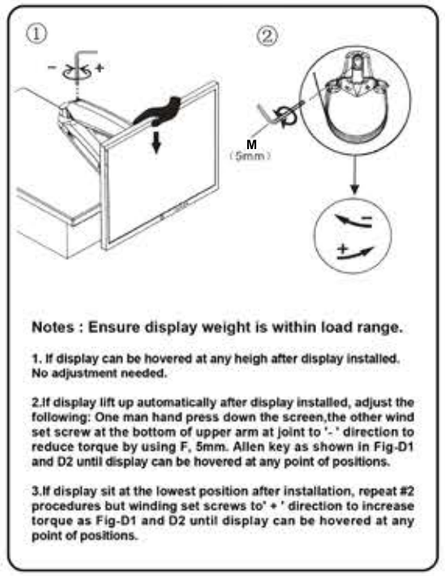



**Notes : Ensure display weight is within load range.**

1. If display can be hovered at any heigh after display installed. No adjustment needed.


2.If display lift up automatically after display installed, adjust the following: One man hand press down the screen,the other wind set screw at the bottom of upper arm at joint to '- ' direction to reduce torque by using F, 5mm. Allen key as shown in Fig-D1 and D2 until display can be hovered at any point of positions.

3.If display sit at the lowest position after installation, repeat #2 procedures but winding set screws to' + ' direction to increase torque as Fig-D1 and D2 until display can be hovered at any point of positions.


**F.Setting tilt angles**

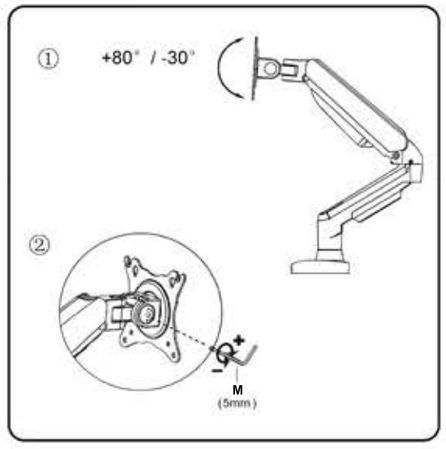


**G.Setting swivel tightness**

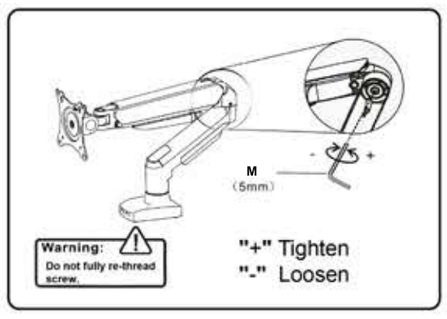


**H.Display rotation**

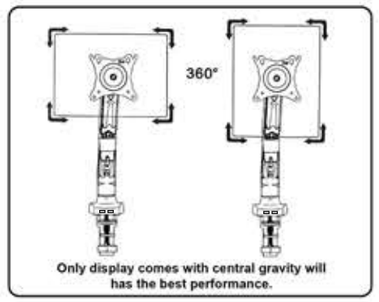


**TENSION ADJUSTMENT AFTER WALL MOUNT INSTALLATION**


Warning

Do not adjust tension without putting on display.

1.Ensure display has been put onto mount.

2.Read your display packaging or manual to find out display nei weight.

3.Ensure display net weight between 4.4-19.8lbs (2.0-9kg).









Distributed exclusively by COE Distributing!