


# GEMTOR™

... when your life is on the line™  
Since 1985

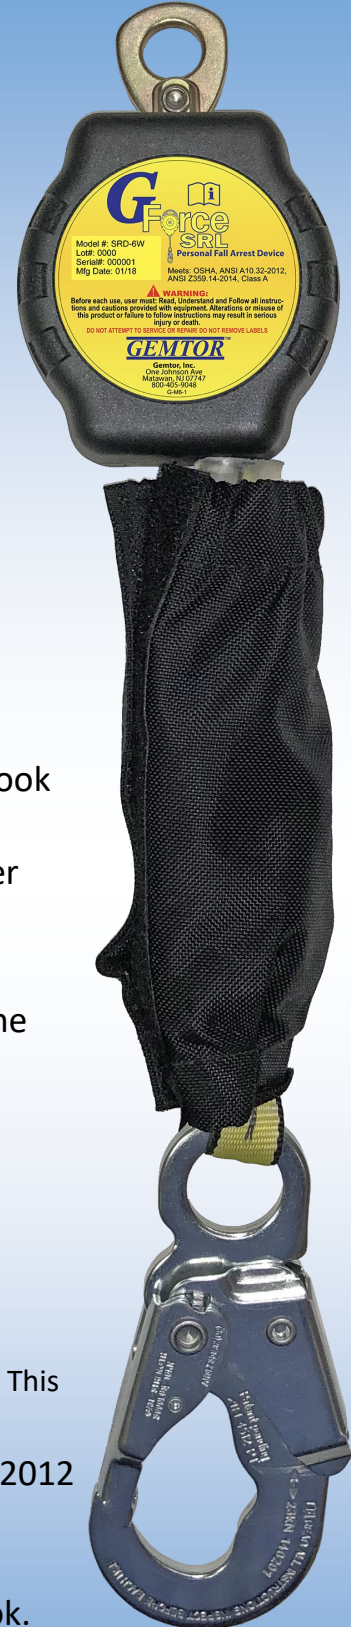

## Model# SRD-6W Self-Retracting Lifeline/Fall Limiter

### Specifications:

**Connector:** ANSI Z359.12 compliant, zinc plated locking steel snaphook with 3600 lbs. gate strength.

**Anchorage Connector:** Zinc plated alloy steel, ANSI Z359.12 carabiner with 3600 lbs. gate strength.

**Housing:** Engineered Nylon over steel frame

**Lifeline Material:** .75" wide Ultra-high-molecular-weight polyethylene (UHMWPE)/polyester blend webbing, 4000 lbs. MBS

**Lifeline Length:** 6 ft.

**Weight:** 2 lbs.

**Max Arresting Distance:** <24"

**Average Arresting Force:** <1350 lbs.

**Capacity:** 310\*lbs. (one worker)

\*NOTE: 130-310 lbs. (59-140kg.) is the capacity range allowed by ANSI Z359.14. This SRD has been designed and tested to a capacity of 350 lbs. (159kg)

**Standards Compliance:** OSHA, ANSI Z359.14-2014 Class A, A10-32-2012

### Available Models:

**SRD-6W** - Self-retracting lanyard w/ 6 ft. of webbing

**SRD-6WZ** - Self-retracting lanyard w/ 6 ft. of webbing, 3100 snaphook.

SRD-6W\_Rev\_1-2018



Gemtor, Inc. • One Johnson Avenue • Matawan, NJ 07747  
Phone: 732-583-6200 • 800-405-9048 • Fax: 732-290-9391  
Web: [www.gemtor.com](http://www.gemtor.com) • Email: [sales.info@gemtor.com](mailto:sales.info@gemtor.com)

