
CLAMP CONNECTORS

Certifications:


E23762


Application: Used to connect non-metallic shethed cable to a steel outlet box or other metal enclosure. Dry location.

General: Indoor use. Refer to chart on page 2 to identify the appropriate product trade size based on conduit size and to determine the cable capacity and compatible cable range for each connector.

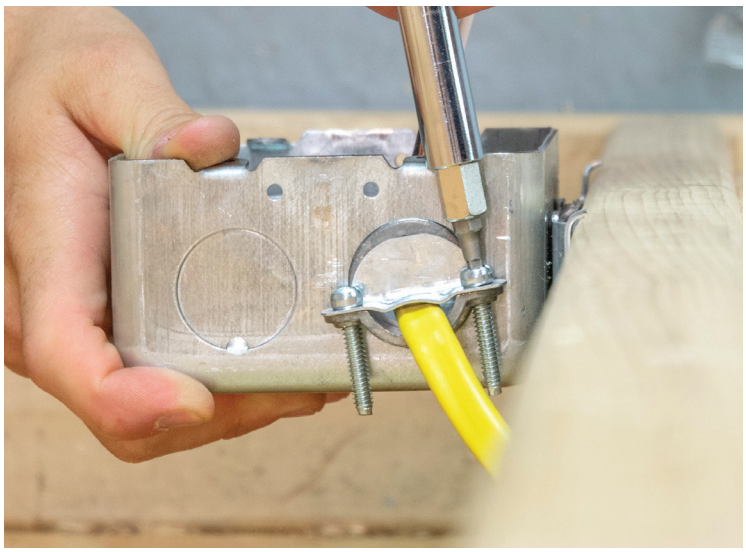







	PART #	SIZE	A	B	C	D
UPC	**20511**[1]	3/8" (1/2" KO)	0.80	0.89	0.63	1.17
	20512[2]	3/4"	0.92	1.19	0.84	1.66
	90513[3]	1"	1.09	1.44	1.11	1.95
	90514[4]	1 1/4"	1.25	1.75	1.38	2.16
	05115[5]	1 1/2"	1.43	2.03	1.61	2.93
	05120[6]	2"	1.57	2.47	2.05	2.93
CCP	**05103B1**	3/8" (1/2" KO)	0.80	0.89	0.63	1.17
	05107B2	3/4"	0.92	1.19	0.84	1.66
	05110B3	1"	1.09	1.44	1.11	1.95
BULK	**05112B**[4]	1 1/4"	1.25	1.75	1.38	2.16
	05115B[5]	1 1/2"	1.43	2.03	1.61	2.93
	05120B[6]	2"	1.57	2.47	2.05	2.93

CONNECTOR CABLE CAPACITY AND COMPATIBLE CABLE RANGES BY CONNECTOR SIZE

	SIZE	NO. OF CABLES	NM CABLE RANGES, AWG	FLEX CORD RANGE	SE OVALCABLE RANGE	SER ROUND RANGE	SEU RANGE
NM	3/8" (1/2" KO)	1	14-2, 14-3, 14-4, 12-2, 12-3, 12-4, 10-2, 10-3, 8-3	0.21" TO 0.56" -	-	-	-
		2	14-2, 14-3, 12-2, 10-2				
		3	14-2				
		MULTIPLE	(1) 14-2 AND (1) 14-3 (1) 14-2 AND (1) 12-2 (1) 14-2 AND (1) 12-3 (1) 14-2 AND (1) 10-2 (1) 14-3 AND (1) 12-2 (1) 12-2 AND (1) 12-3 (1) 12-2 AND (1) 10-2 (2) 14-2 AND (1) 14-3 (2) 14-2 AND (1) 12-3			
	3/4"	1	14-3, 14-4, 12-3, 12-4, 10-2, 10-3, 8-2, 8-3, 6-2, 6-3, 4-2	0.40" TO 0.72"	0.52 X 0.61" AND 0.51 X 0.80"	0.57" TO 0.69"	(6-6-6) 0.45" TO 0.70"
		2	14-2, 14-3, 14-4, 12-2, 12-3, 12-4, 10-2, 10-3				
		3	14-2, 14-3, 14-4, 12-2, 12-3,10-2				
		MULTIPLE	(1) 14-3 AND (1) 12-3 (1) 14-3 AND (1) 10-3 (1) 12-3 AND (1) 10-3				
	1"	1	12/3 THROUGH 4/3, 8/2, 6/2	04.45" to 0.82"	0.51 X 0.80" AND 0.62 X 0.975"	0.68" TO 0.92"	(6-6-6) (2-2-2) 0.45" TO 0.70" 0.57" TO 0.92"
		2	10/3, 8/2, 8/3				
		3	8/2, 10/2				
	1 1/4"	1	4/3, 2/3	0.800" TO 1.350"	0.67 X 1.06" AND 0.73 X 1.235"	1.19"	(2-2-2) 2/0 - 2/0- 2/0 0.56" TO 0.92" 0.73" TO 1.22"
	1 1/2"	1	2/3	0.835" TO 1.520"	0.70 X 1.20" AND 0.87 X 1.46"	1.24"	2/0 - 2/0- 2/0 0.73" - 1.22"
	2"	2	4/3, 2/3	1.085" TO 1.520"	-	0.75" TO 1.46"	2/0 - 2/0- 2/0 0.75" - 1.46"